
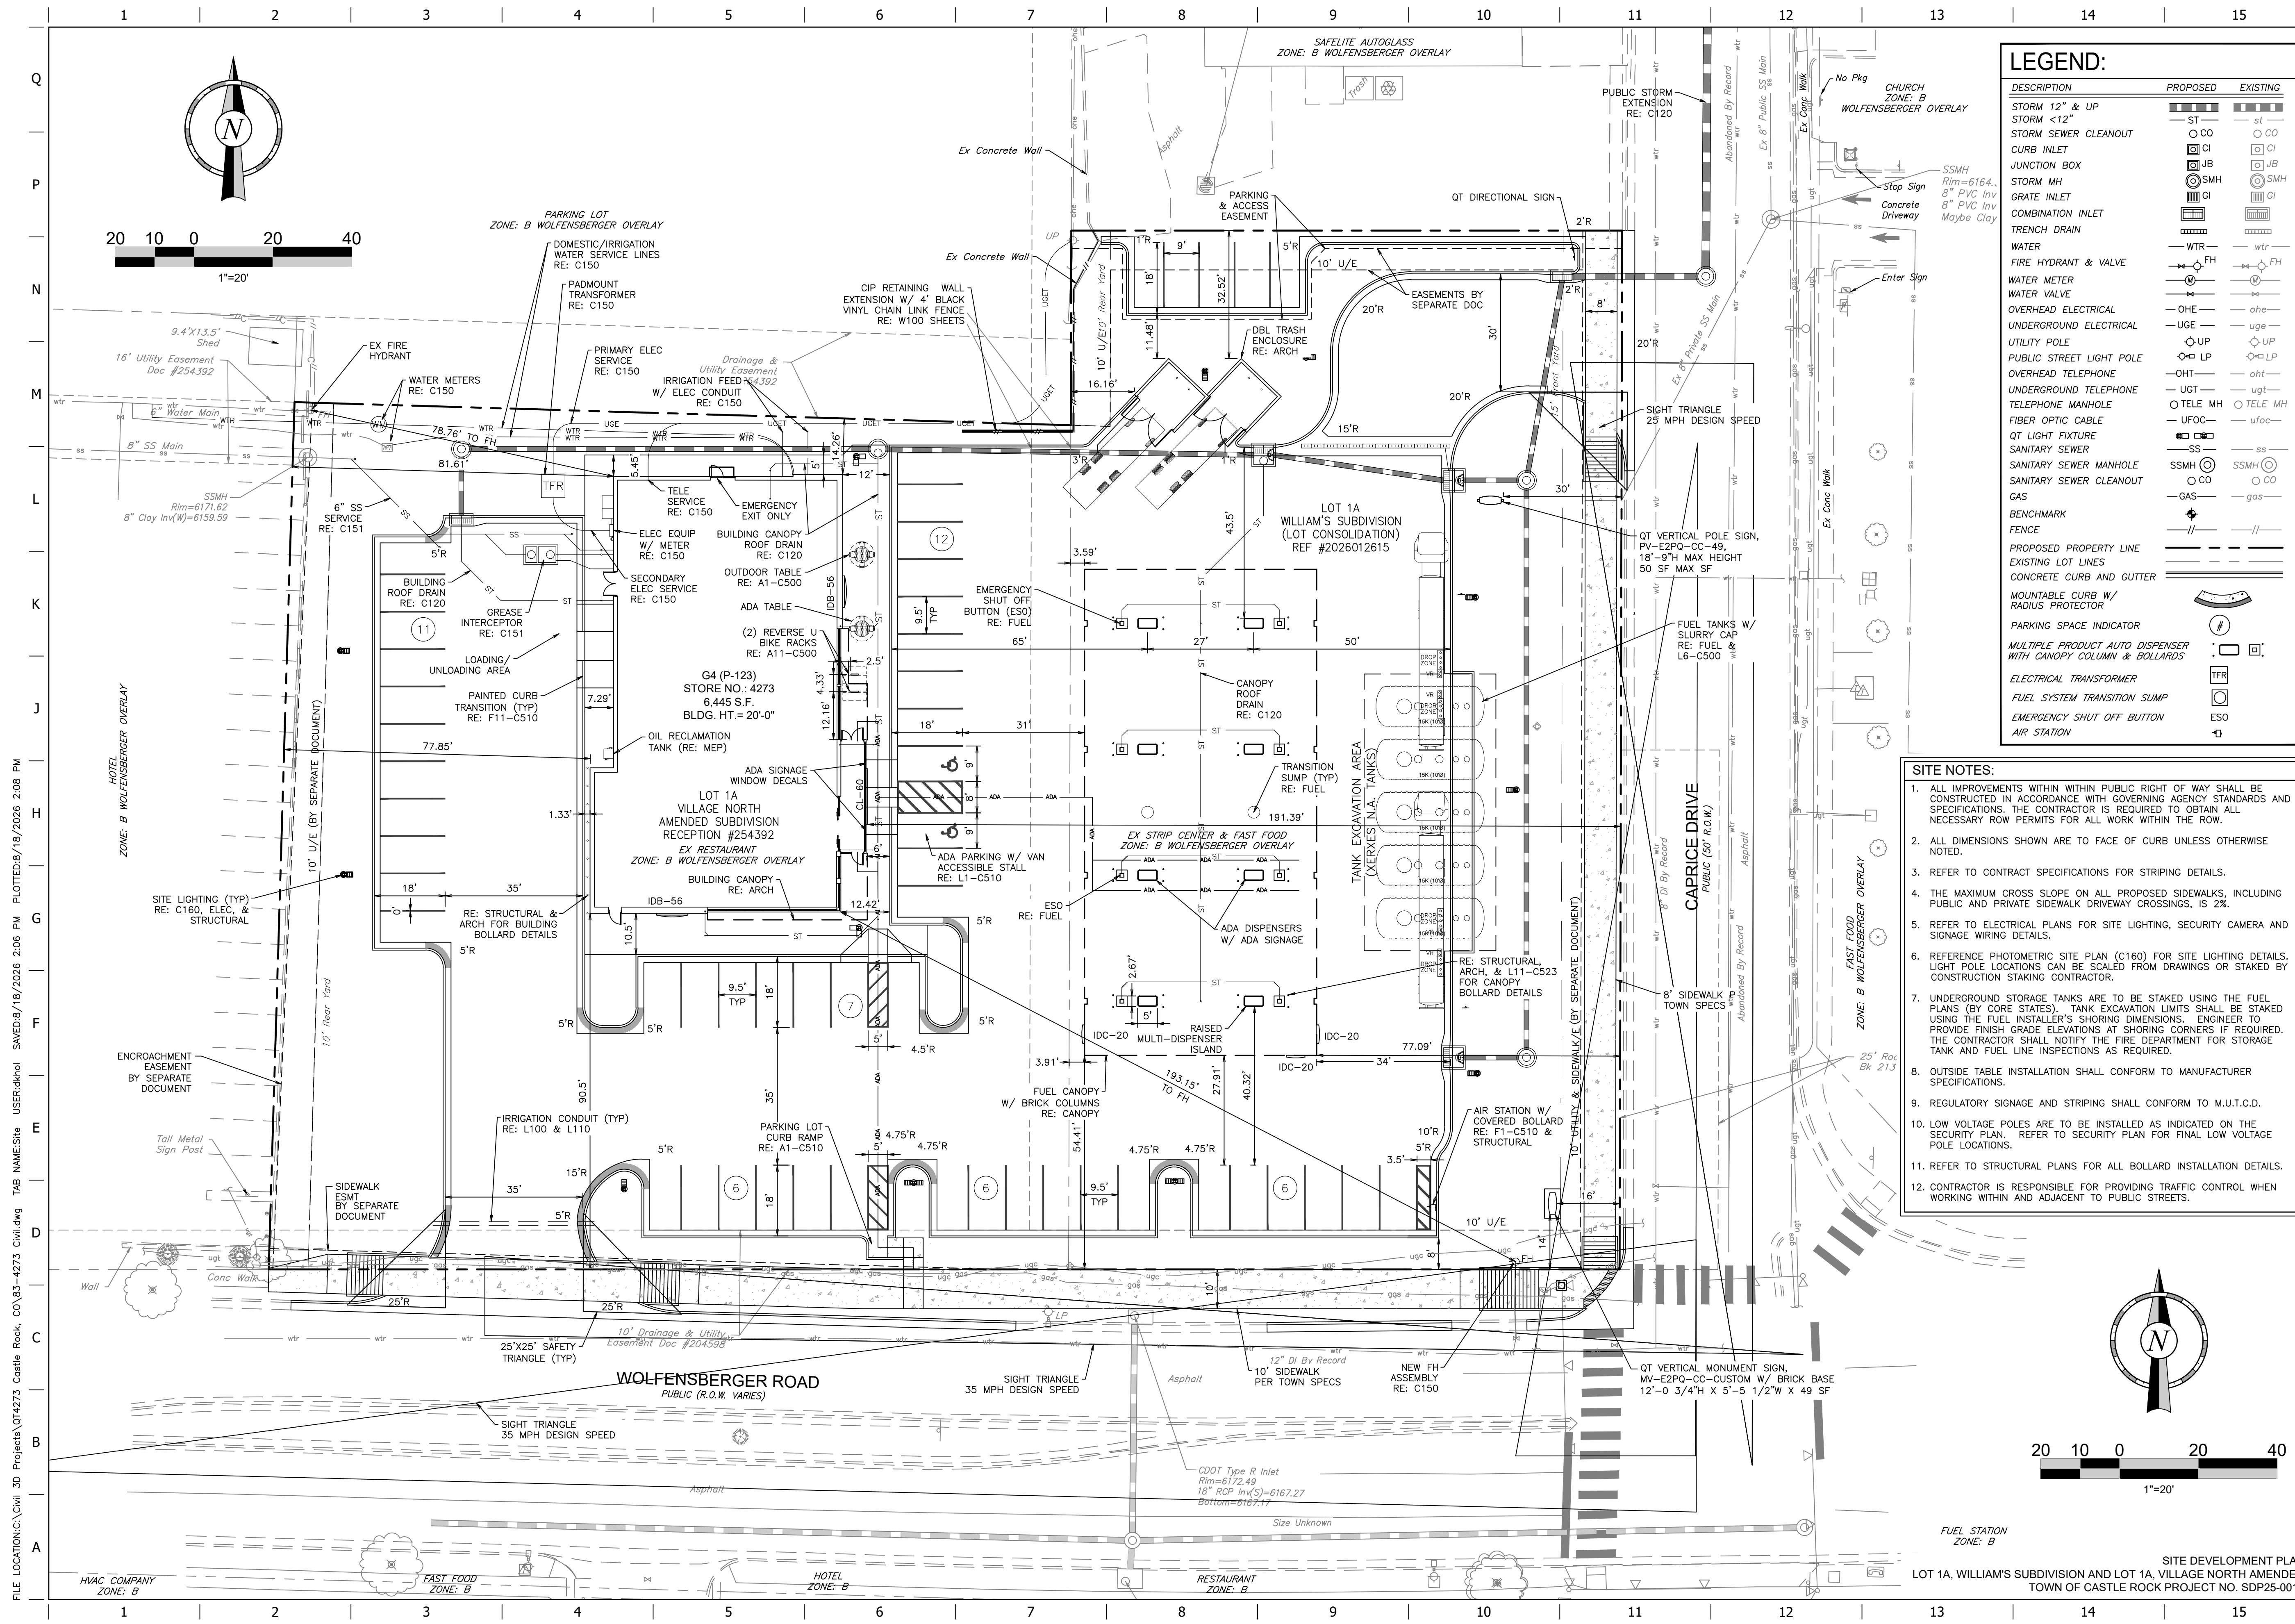
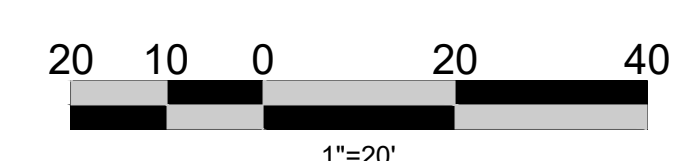


LEGEND:		
DESCRIPTION	PROPOSED	EXISTING
STORM 12" & UP	ST	st
STORM <12"	CO	co
STORM SEWER CLEANOUT	CO	co
CURB INLET	CI	ci
JUNCTION BOX	JB	jb
STORM MH	SMH	smh
GRATE INLET	GI	gi
COMBINATION INLET		
TRENCH DRAIN	WTR	wtr
WATER	WTR	wtr
FIRE HYDRANT & VALVE	FH	fh
WATER METER		
WATER VALVE		
OVERHEAD ELECTRICAL	OHE	ohe
UNDERGROUND ELECTRICAL	UGE	uge
UTILITY POLE	UP	up
PUBLIC STREET LIGHT POLE	LP	lp
OVERHEAD TELEPHONE	OHT	oht
UNDERGROUND TELEPHONE	UGT	ugt
TELEPHONE MANHOLE	TELE MH	tele mh
FIBER OPTIC CABLE	UFOC	ufoc
QT LIGHT FIXTURE		
SANITARY SEWER	SS	ss
SANITARY SEWER MANHOLE	SSMH	ssmh
SANITARY SEWER CLEANOUT	CO	co
GAS	GAS	gas
BENCHMARK		
FENCE		
PROPOSED PROPERTY LINE		
EXISTING LOT LINES		
CONCRETE CURB AND GUTTER		
MOUNTABLE CURB W/ RADIUS PROTECTOR		
PARKING SPACE INDICATOR		
MULTIPLE PRODUCT AUTO DISPENSER WITH CANOPY COLUMN & BOLLARDS		
ELECTRICAL TRANSFORMER	TFR	tfr
FUEL SYSTEM TRANSITION SUMP	ESO	eso
EMERGENCY SHUT OFF BUTTON		
AIR STATION		

- SITE NOTES:**
- ALL IMPROVEMENTS WITHIN PUBLIC RIGHT OF WAY SHALL BE CONSTRUCTED IN ACCORDANCE WITH GOVERNING AGENCY STANDARDS AND SPECIFICATIONS. THE CONTRACTOR IS REQUIRED TO OBTAIN ALL NECESSARY ROW PERMITS FOR ALL WORK WITHIN THE ROW.
 - ALL DIMENSIONS SHOWN ARE TO FACE OF CURB UNLESS OTHERWISE NOTED.
 - REFER TO CONTRACT SPECIFICATIONS FOR STRIPING DETAILS.
 - THE MAXIMUM CROSS SLOPE ON ALL PROPOSED SIDEWALKS, INCLUDING PUBLIC AND PRIVATE SIDEWALK DRIVEWAY CROSSINGS, IS 2%.
 - REFER TO ELECTRICAL PLANS FOR SITE LIGHTING, SECURITY CAMERA AND SIGNAGE WIRING DETAILS.
 - REFERENCE PHOTOMETRIC SITE PLAN (C160) FOR SITE LIGHTING DETAILS. LIGHT POLE LOCATIONS CAN BE SCALED FROM DRAWINGS OR STAKED BY CONSTRUCTION STAKING CONTRACTOR.
 - UNDERGROUND STORAGE TANKS ARE TO BE STAKED USING THE FUEL PLANS (BY CORE STATES). TANK EXCAVATION LIMITS SHALL BE STAKED USING THE FUEL INSTALLER'S SHORING DIMENSIONS. ENGINEER TO PROVIDE FINISH GRADE ELEVATIONS AT SHORING CORNERS IF REQUIRED. THE CONTRACTOR SHALL NOTIFY THE FIRE DEPARTMENT FOR STORAGE TANK AND FUEL LINE INSPECTIONS AS REQUIRED.
 - OUTSIDE TABLE INSTALLATION SHALL CONFORM TO MANUFACTURER SPECIFICATIONS.
 - REGULATORY SIGNAGE AND STRIPING SHALL CONFORM TO M.U.T.C.D.
 - LOW VOLTAGE POLES ARE TO BE INSTALLED AS INDICATED ON THE SECURITY PLAN. REFER TO SECURITY PLAN FOR FINAL LOW VOLTAGE POLE LOCATIONS.
 - REFER TO STRUCTURAL PLANS FOR ALL BOLLARD INSTALLATION DETAILS.
 - CONTRACTOR IS RESPONSIBLE FOR PROVIDING TRAFFIC CONTROL WHEN WORKING WITHIN AND ADJACENT TO PUBLIC STREETS.

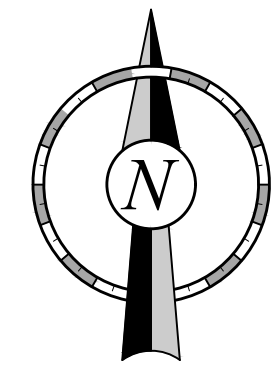

PROJECT NO.: 83-4273

MG


Midwest Design Group
Kansas City

PO Box 860015
Shawnee, KS 66286-0015
P 913.248.9385

SITE DEVELOPMENT PLAN

QuikTrip No. 4273

WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109

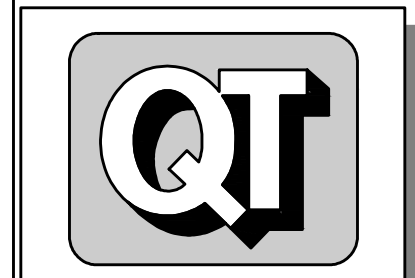


PROTOTYPE: P-123
DIVISION: 83
VERSION: 001
DESIGNED BY: DKH
DRAWN BY: CSH
REVIEWED BY: AMG

REV	DATE	DESCRIPTION

SHEET TITLE:
**SITE DEVELOPMENT PLAN
SITE PLAN**

SHEET NUMBER:
2 OF 18

FILE LOCATION: C:\Civil 3D Projects\Q14273 Castle Rock, CO\83-4273 Civil.dwg TAB NAME: Site
USER: dmh
SAVED: 8/18/2026 2:06 PM
PLOTED: 8/18/2026 2:08 PM

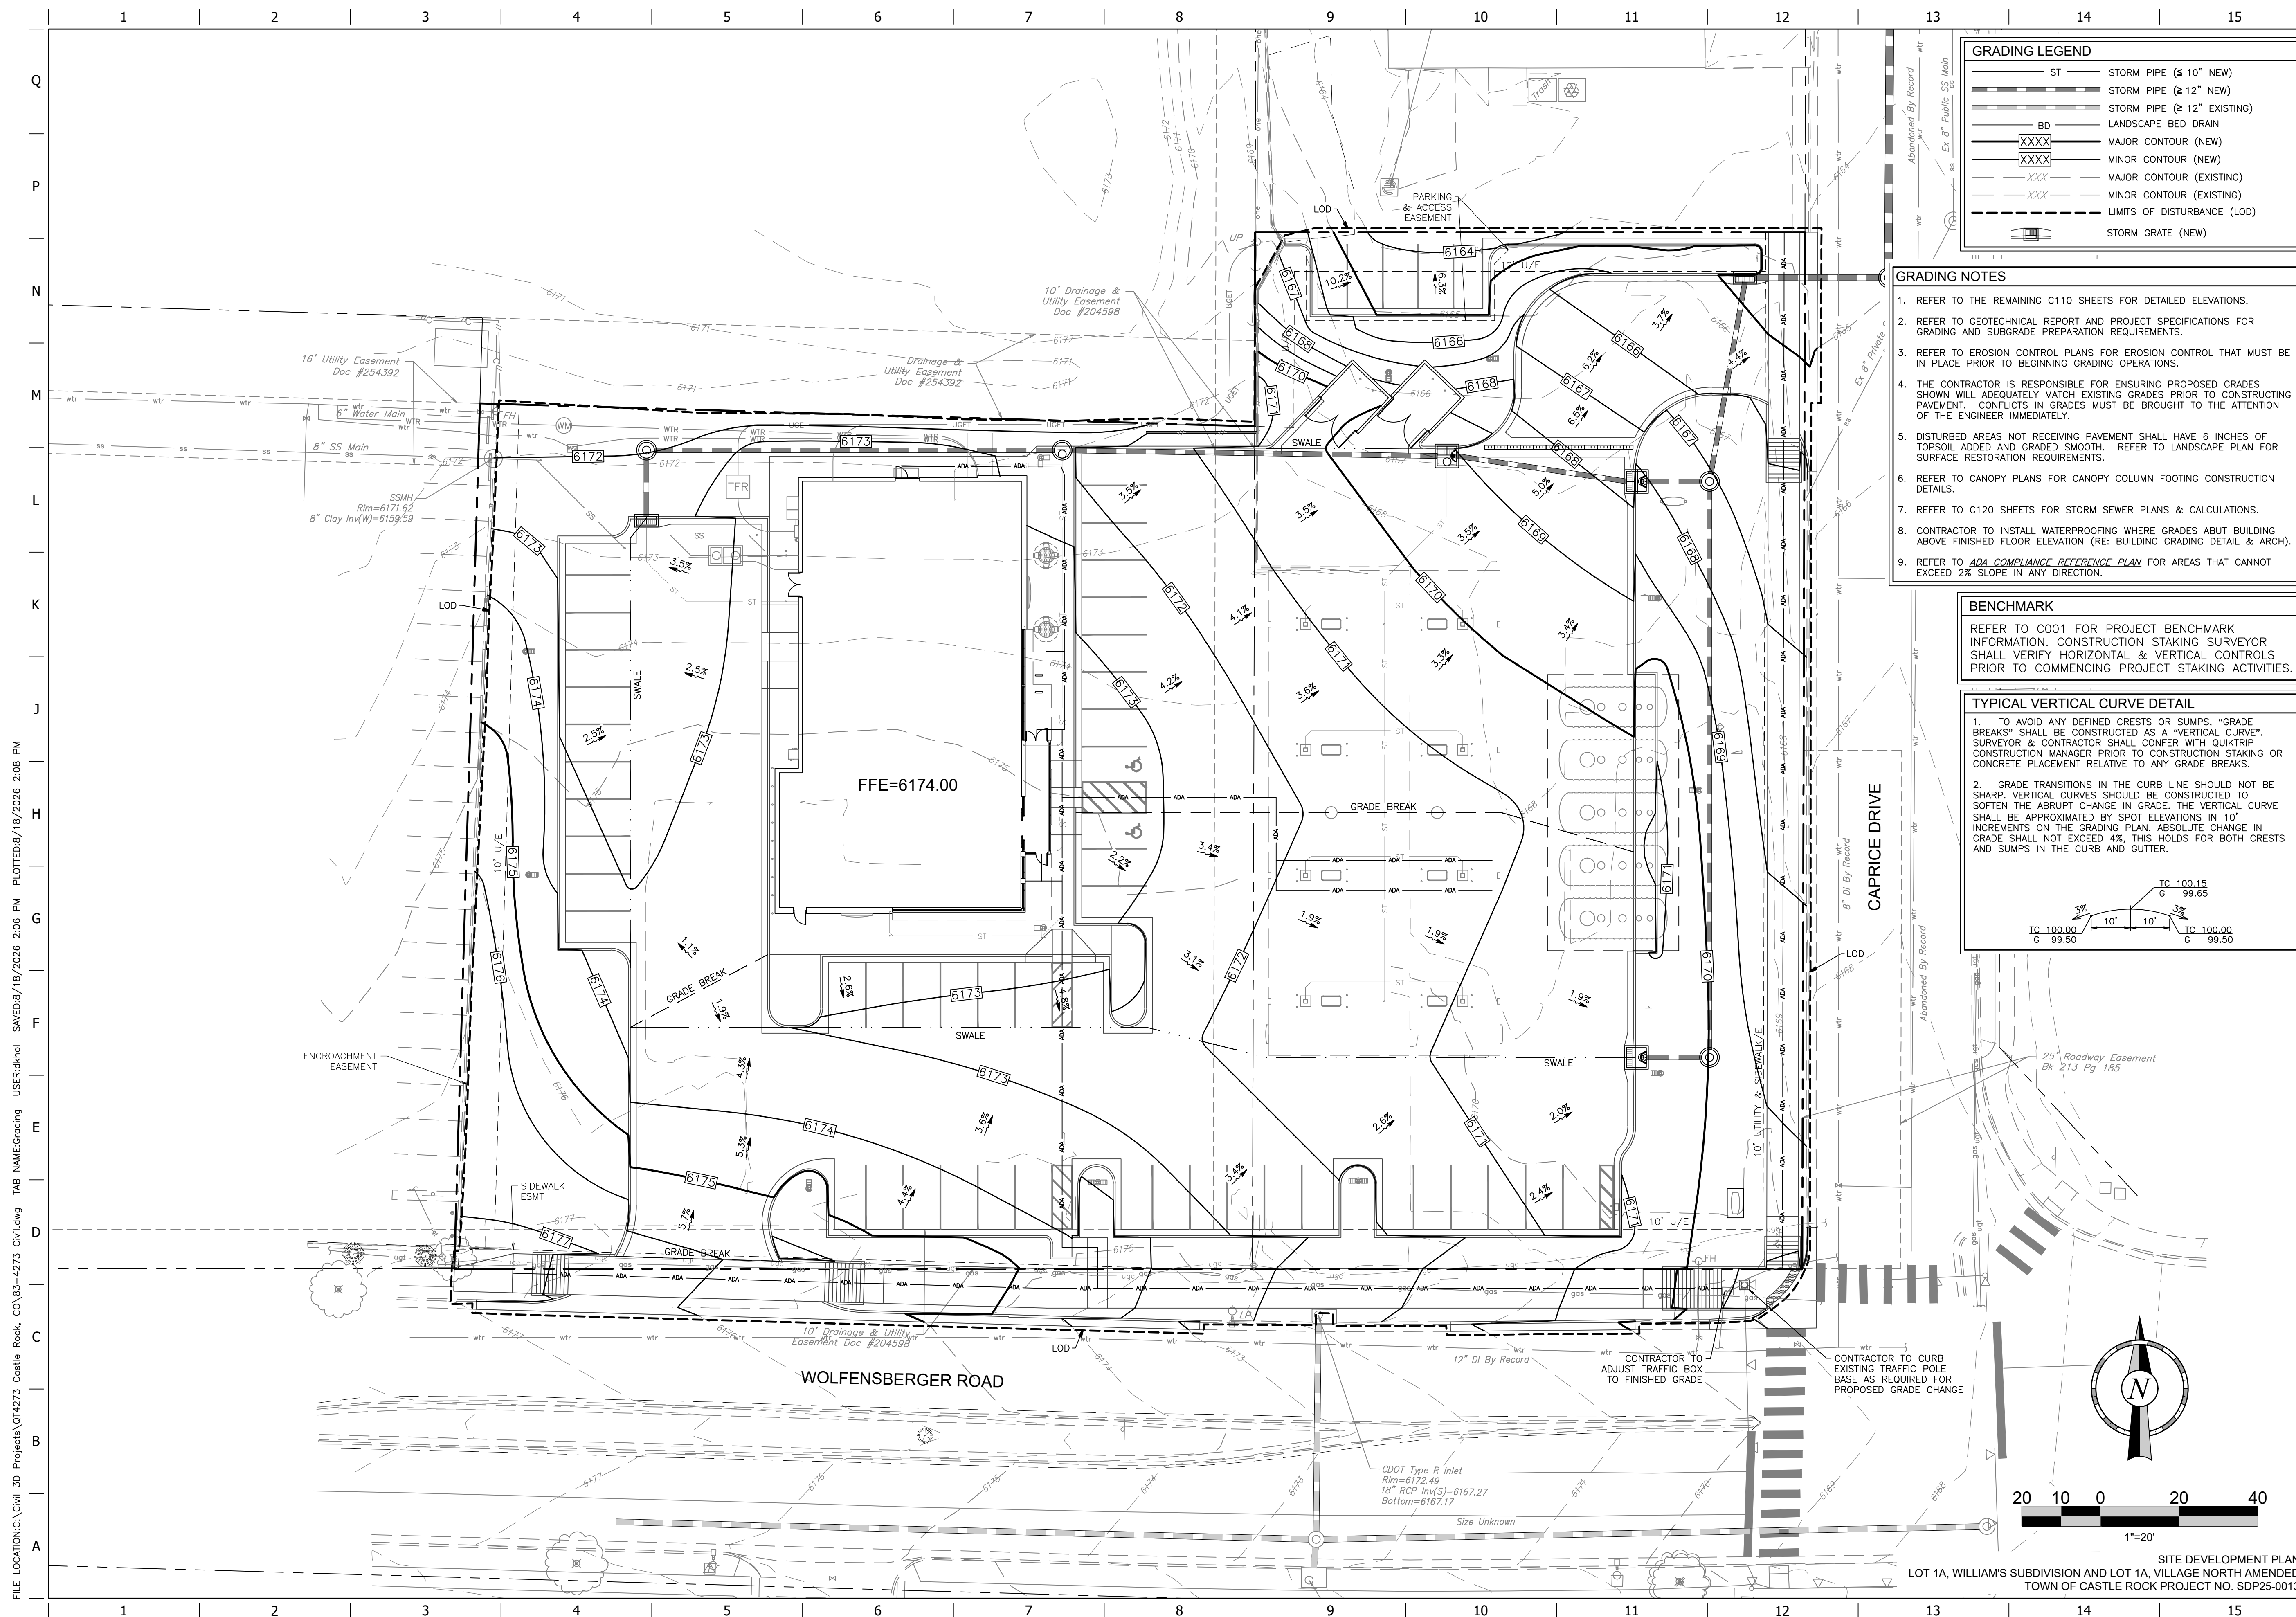

PROJECT NO.:83-4273



PO Box 860015
Shawnee, KS 66286-0015
P 913.248.9385

SITE DEVELOPMENT PLAN

QuikTrip No. 4273

WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109



© COPYRIGHT QUIKTRIP CORPORATION 2011
ANY UNAUTHORIZED USE, REPRODUCTION,
PUBLICATION, DISTRIBUTION, OR SALE IN
WHOLE OR IN PART, IS STRICTLY FORBIDDEN.

PROTOTYPE: P-123
DIVISION: 83
VERSION: 001
DESIGNED BY: DKH
DRAWN BY: CSH
REVIEWED BY: AMG


[illegible]

SHEET TITLE:
SITE DEVELOPMENT PLAN OVERALL GRADING PLAN

SHEET NUMBER:

3 OF 18



FILE LOCATION: C:\Civil\30 Projects\Q14273 Castle Rock, CO\83-4273 Civil.dwg TAB NAME: Storm USER: dkh01 PLOTTED: 08/16/2026 2:08 PM
A B C D E F G H J K L M N P Q
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

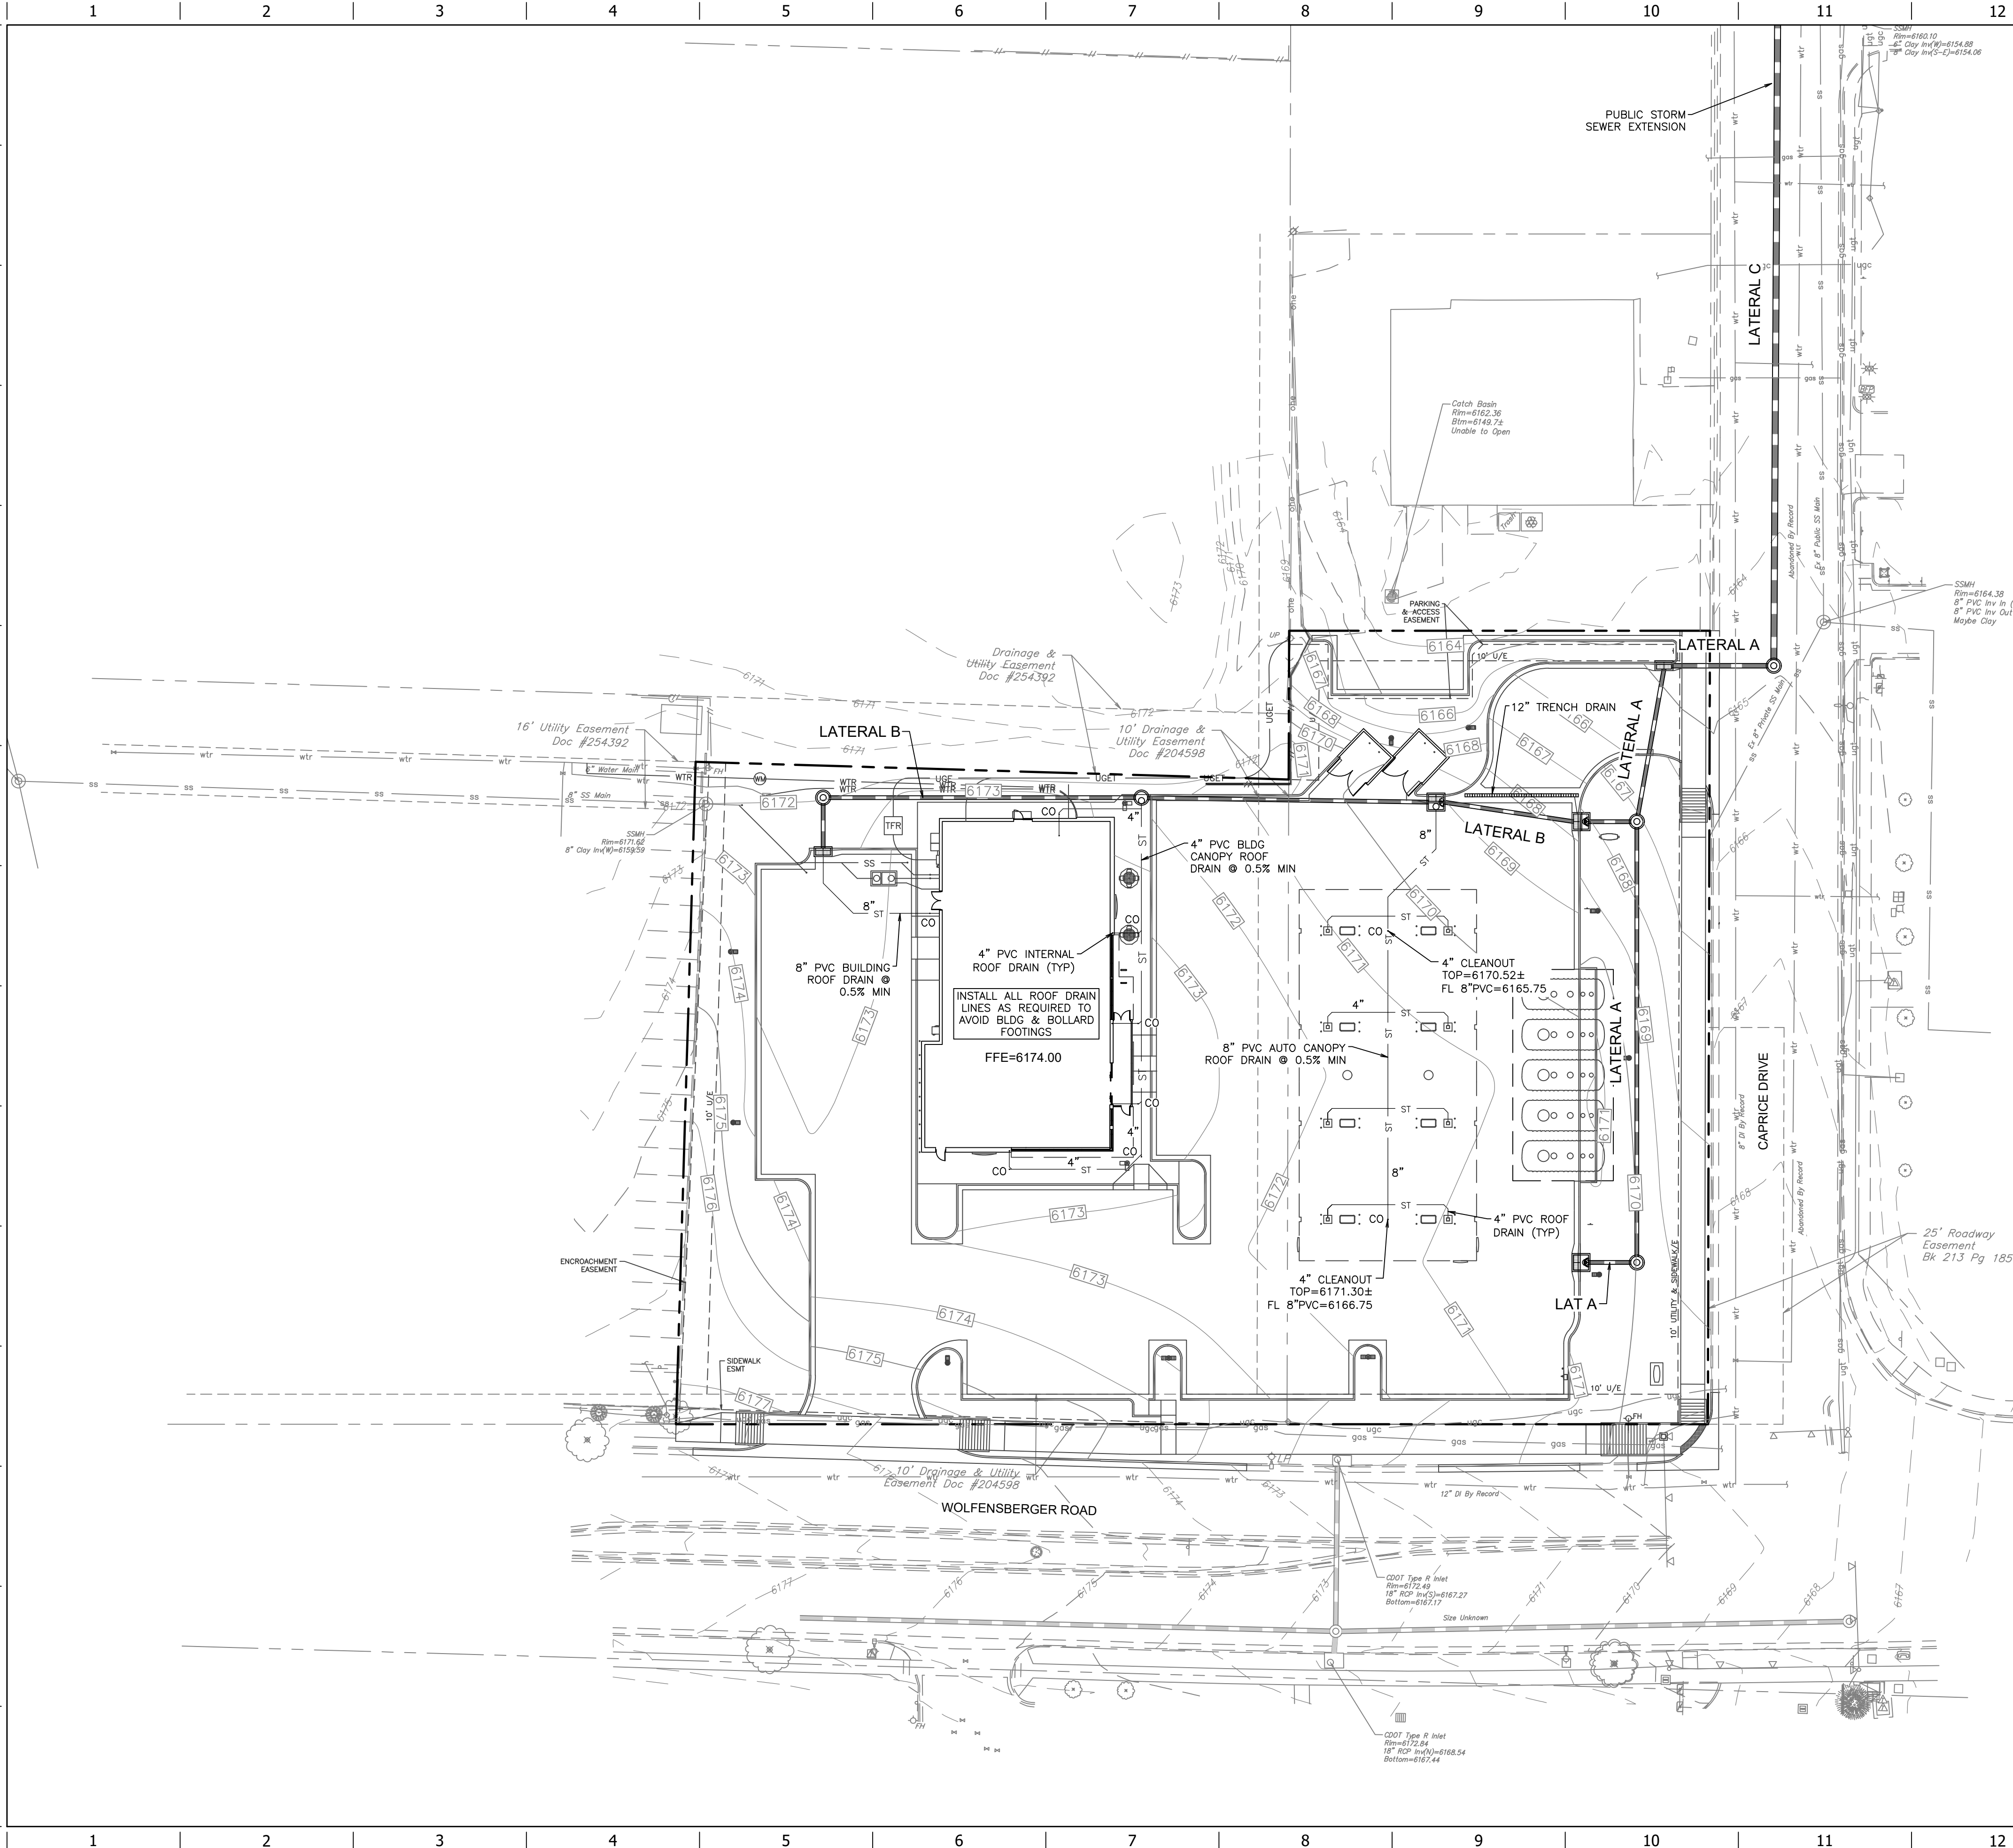


STORM SEWER LEGEND

ST	STORM PIPE (< 10" NEW)
BD	LANDSCAPE BED DRAIN
---	STORM PIPE (> 12" NEW)
---	STORM PIPE (> 12" EXISTING)
XXXX	MAJOR CONTOUR (NEW)
XXXX	MINOR CONTOUR (NEW)
XXX	MAJOR CONTOUR (EXISTING)
XXX	MINOR CONTOUR (EXISTING)
[Symbol]	STORM GRATE (NEW)
[Symbol]	STORM SEWER JUNCTION BOX/MH

- STORM SEWER NOTES:**
- GAS CANOPY INSTALLER SHALL INSTALL THE CANOPY COLUMN DRAIN PIPE AND OVERFLOW FITTING. THE STORM WATER INSTALLER SHALL CONNECT THEIR PIPING TO THE GAS INSTALLER'S OVERFLOW FITTING.
 - PRIVATE STORM SEWER PIPE AND TRENCHING SHALL CONFORM TO CONTRACT SPECIFICATIONS.
 - PRIOR TO THE CONSTRUCTION OF, OR CONNECTION TO ANY STORM DRAIN, SANITARY SEWER, OR ANY OTHER ELEVATION SENSITIVE UTILITY, THE CONTRACTOR SHALL EXCAVATE, VERIFY AND CALCULATE ALL POINTS OF CONNECTIONS AND ALL UTILITY CROSSINGS. THE CONTRACTOR SHALL INFORM THE ENGINEER AND THE OWNER OF ANY CONFLICT OR REQUIRED DEVIATIONS FROM THE PLAN. THE ENGINEER WILL BE HELD HARMLESS IN THE EVENT THE ENGINEER IS NOT NOTIFIED OF A DESIGN CONFLICT.
 - CARE MUST BE TAKEN WHEN INSTALLING THE BUILDING ROOF DRAINAGE SYSTEMS TO AVOID UTILITY/FUEL CROSSING CONFLICTS, BUILDING FOOTINGS, AND BOLLARDS. UTILITY CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLING ALL FITTINGS REQUIRED FOR INSTALLATION. ROOF DRAINAGE LAYOUT SHOWN IS SCHEMATIC AND DOES NOT REPRESENT ALL FITTINGS REQUIRED FOR CONSTRUCTION.
 - STORM SEWER STRUCTURES ON-GRADE ARE TO MATCH GRADE. ELEVATION CALLOUTS ARE TO CENTER OF STRUCTURE. STRUCTURES ON GRADE ARE TO BE CAST IN PLACE AS NECESSARY.
 - ALL STORM SEWER CLEANOUTS ARE TO BE 4" DIAMETER UNLESS OTHERWISE NOTED. REFER TO C500 & PROJECT SPECIFICATIONS FOR DETAILS.
 - ALL EXTERIOR PVC STORM PIPE SHALL BE SDR35 WITH WATERTIGHT FITTINGS.
 - REFER TO REMAINING C120 SHEETS FOR STORM SEWER PROFILES AND DETENTION DETAILS.
 - REFER TO C540 SHEETS FOR STORM SEWER CONSTRUCTION DETAILS.
 - RCP STORM SEWER PIPE SHALL BE CLASS III (WALL B).
 - SNOUT WATER QUALITY UNITS ARE TO BE INSTALLED PER MANUFACTURER SPECIFICATIONS. WQ UNITS ARE TO BE INSTALLED WITH BIO-SKIRTS PER MANUFACTURER SPECIFICATIONS. REFER TO C540 SHEETS FOR DETAILS. STORM PIPE AT SNOUT LOCATIONS SHALL BE INSTALLED FLAT WITH STRUCTURE WALL SO AS NOT TO IMPEDE THE SNOUT INSTALLATION PER MANUFACTURER SPECIFICATIONS.
 - STORM SEWER MANHOLES & JUNCTION BOXES SHALL CONFORM TO TOWN SPECIFICATIONS.
 - TRENCH DRAINS SHALL BE HYDROBLOCK TRENCH DRAINS PER PLAN. NO SUBSTITUTIONS ARE ALLOWED. REFER TO C540 SHEETS FOR DETAILS.
 - ALL TRENCH DRAIN LENGTHS ARE SCHEMATIC AND ARE SUBJECT TO CHANGE PER MANUFACTURER. MANUFACTURER TO MINIMIZE TRENCH DRAIN LENGTH ADJUSTMENTS TO AVOID PLAN CONFLICTS.
 - ALL HYDROBLOCK TRENCH DRAIN RUNS SHALL RECEIVE MAINTENANCE SECTIONS AT 50' MAXIMUM INTERVALS AND/OR PER MANUFACTURER RECOMMENDATIONS.
 - REFER TO CANOPY PLANS FOR TRUCK CANOPY ROOF DRAIN LOCATIONS. CANOPY PLANS SHALL GOVERN.

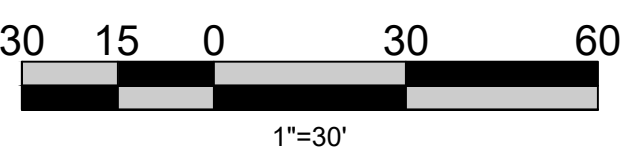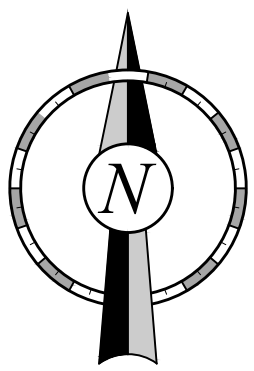

SITE DEVELOPMENT PLAN
LOT 1A, WILLIAM'S SUBDIVISION AND LOT 1A, VILLAGE NORTH AMENDED
TOWN OF CASTLE ROCK PROJECT NO. SDP25-0013



PROJECT NO.: 83-4273



SITE DEVELOPMENT PLAN
QuikTrip No. 4273
WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109



© COPYRIGHT QUIKTRIP CORPORATION 2011
ANY UNAUTHORIZED USE, REPRODUCTION,
PUBLICATION, DISTRIBUTION, OR SALE IN
WHOLE OR IN PART, IS STRICTLY FORBIDDEN.

PROTOTYPE:	P-123
DIVISION:	83
VERSION:	001
DESIGNED BY:	DKH
DRAWN BY:	CSH
REVIEWED BY:	AMG


REV	DATE	DESCRIPTION

SHEET TITLE:
SITE DEVELOPMENT PLAN
OVERALL STORM PLAN
(SOUTH)

SHEET NUMBER:

4 OF 18

ORIGINAL ISSUE DATE: 08/17/2026

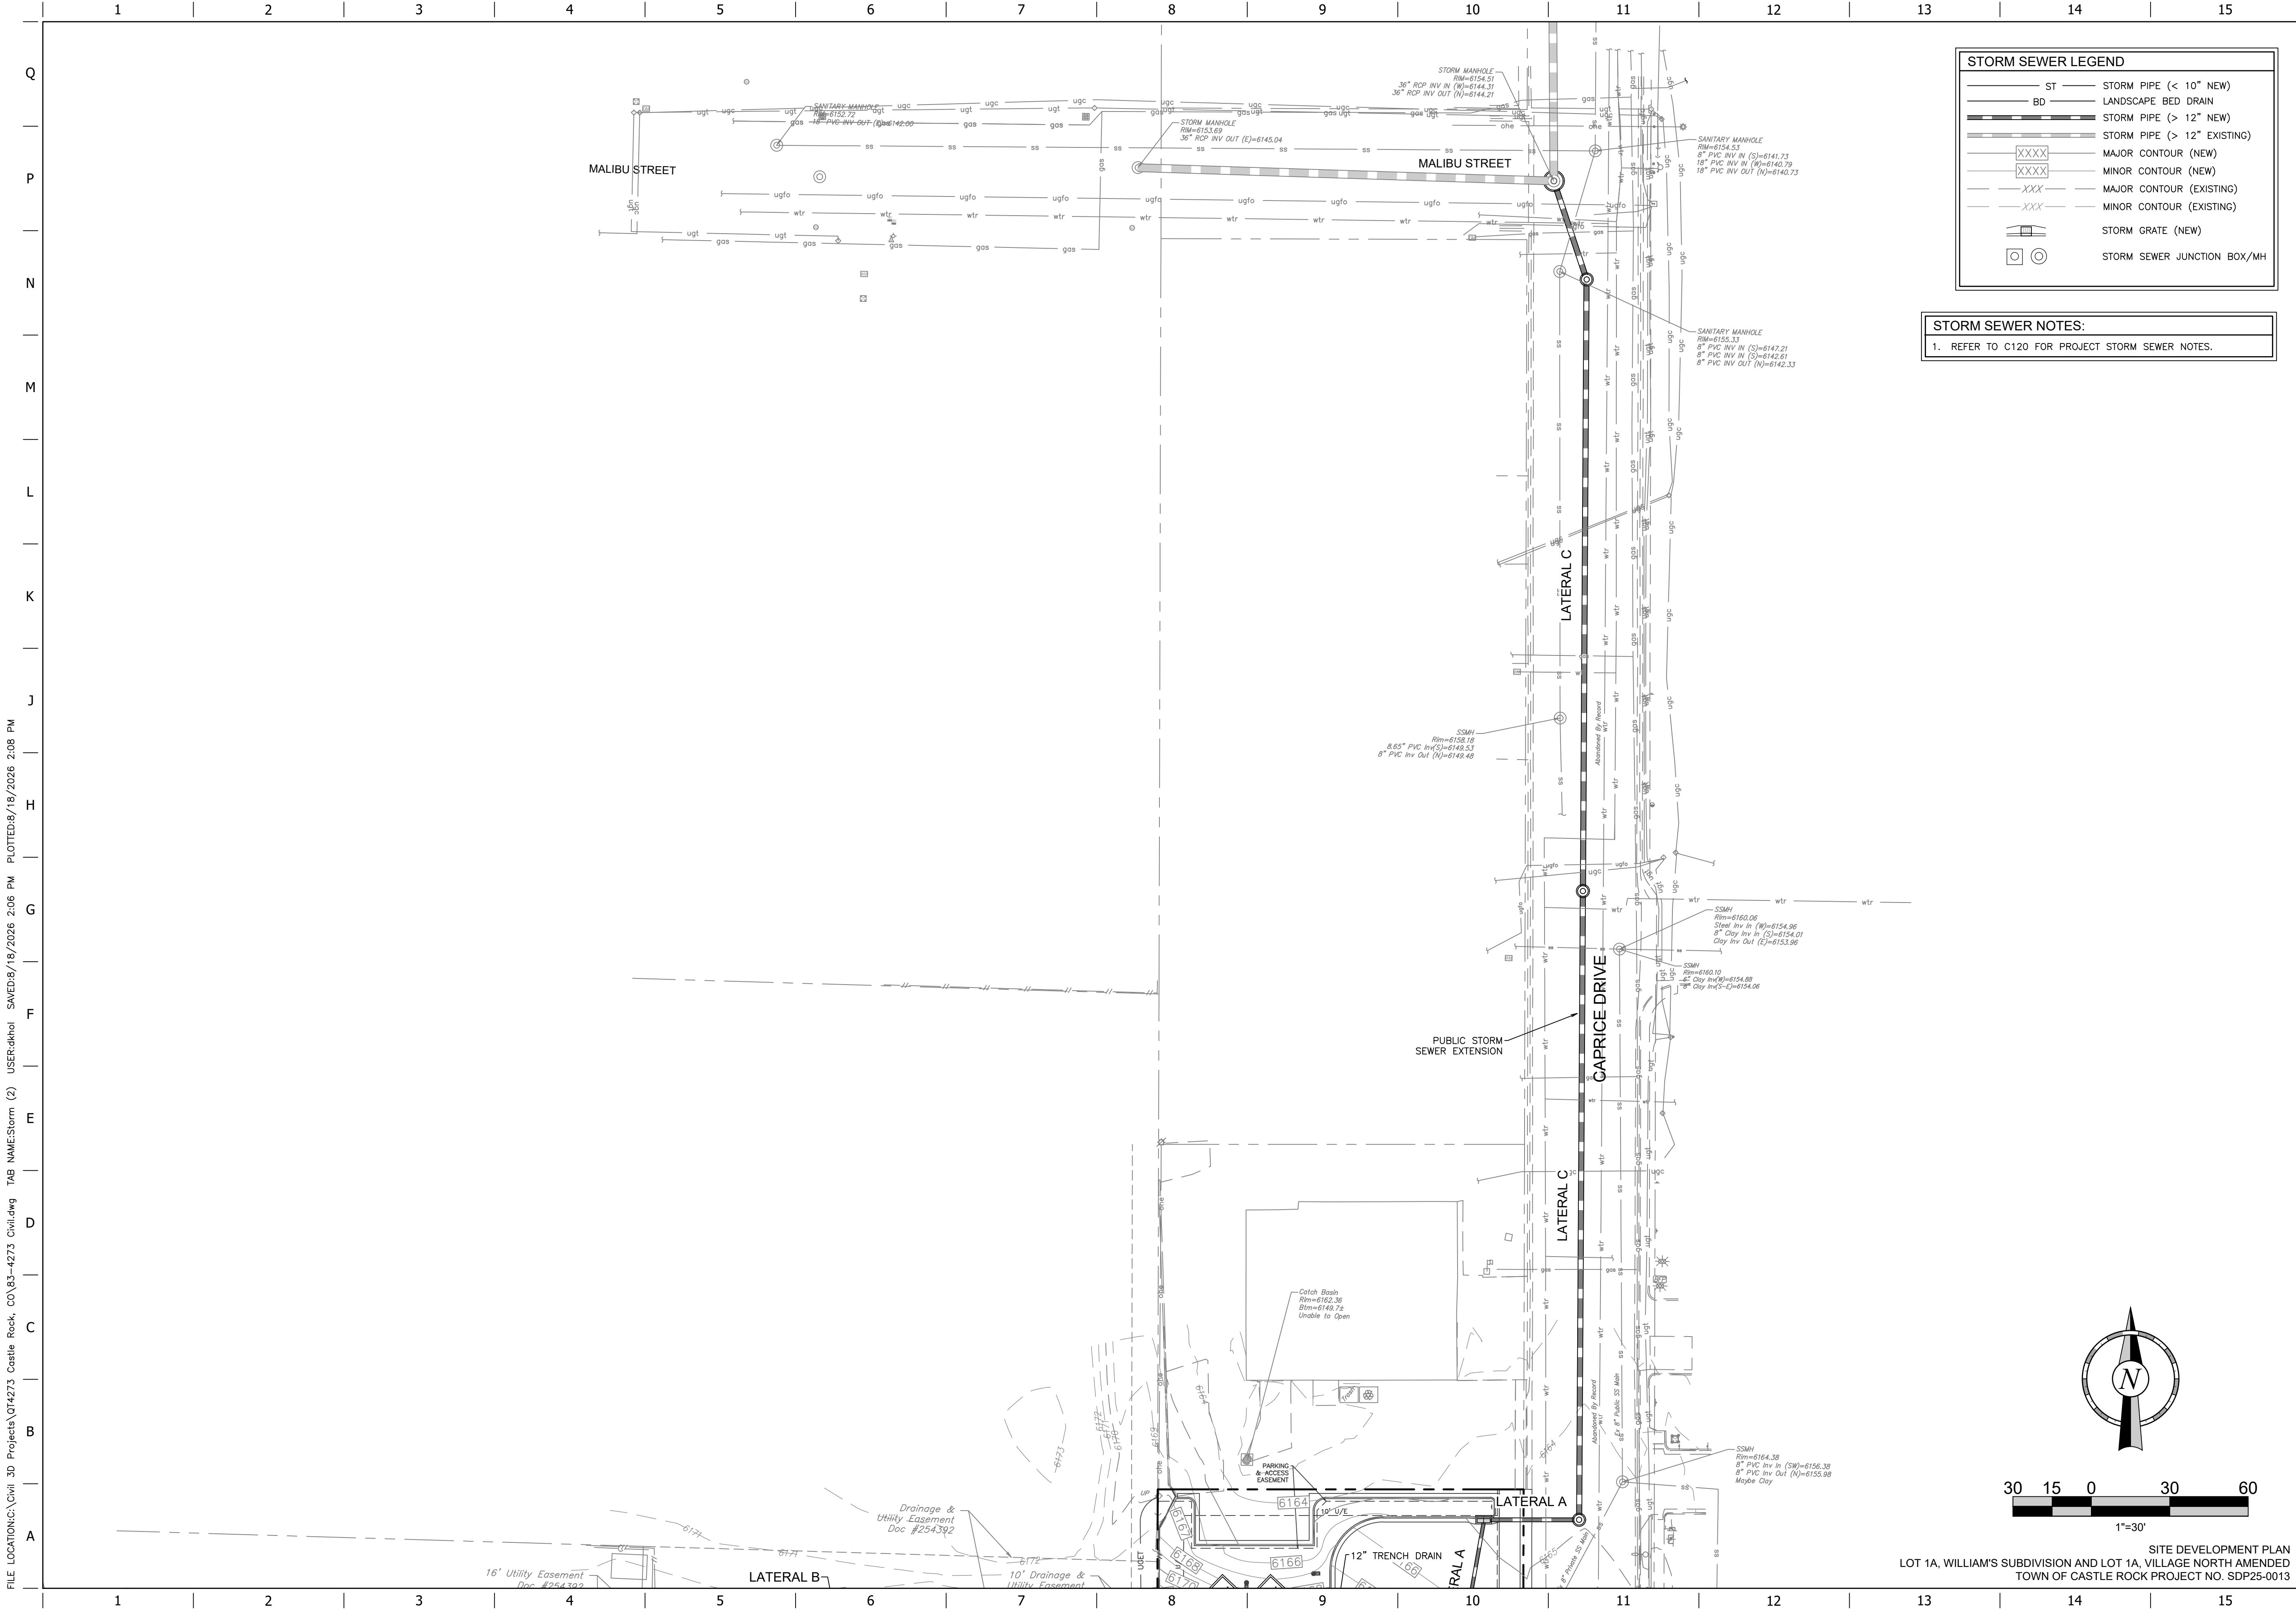


STORM SEWER LEGEND

- ST — STORM PIPE (< 10" NEW)
- BD — LANDSCAPE BED DRAIN
- STORM PIPE (> 12" NEW)
- STORM PIPE (> 12" EXISTING)
- XXXX — MAJOR CONTOUR (NEW)
- XXXX — MAJOR CONTOUR (EXISTING)
- XXX — MINOR CONTOUR (NEW)
- XXX — MINOR CONTOUR (EXISTING)
- [Symbol] — STORM GRATE (NEW)
- [Symbol] — STORM SEWER JUNCTION BOX/MH

STORM SEWER NOTES:

- REFER TO C120 FOR PROJECT STORM SEWER NOTES.



PROJECT NO.: 83-4273

MDG
Midwest Design Group
Kansas City

PO Box 860015
Shawnee, KS 66286-0015
P 913.248.9385

SITE DEVELOPMENT PLAN

QuikTrip No. 4273

WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109



© COPYRIGHT QUIKTRIP CORPORATION 2011
ANY UNAUTHORIZED USE, REPRODUCTION,
PUBLICATION, DISTRIBUTION, OR SALE IN
WHOLE OR IN PART, IS STRICTLY FORBIDDEN.

PROTOTYPE:	P-123
DIVISION:	83
VERSION:	001
DESIGNED BY:	DKH
DRAWN BY:	CSH
REVIEWED BY:	AMG



REV	DATE	DESCRIPTION

ORIGINAL ISSUE DATE: 08/17/2026


SHEET TITLE:
SITE DEVELOPMENT PLAN
OVERALL STORM PLAN
(NORTH)

SHEET NUMBER:

5 OF 18

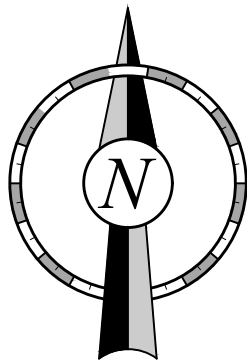

SITE DEVELOPMENT PLAN
LOT 1A, WILLIAM'S SUBDIVISION AND LOT 1A, VILLAGE NORTH AMENDED
TOWN OF CASTLE ROCK PROJECT NO. SDP25-0013

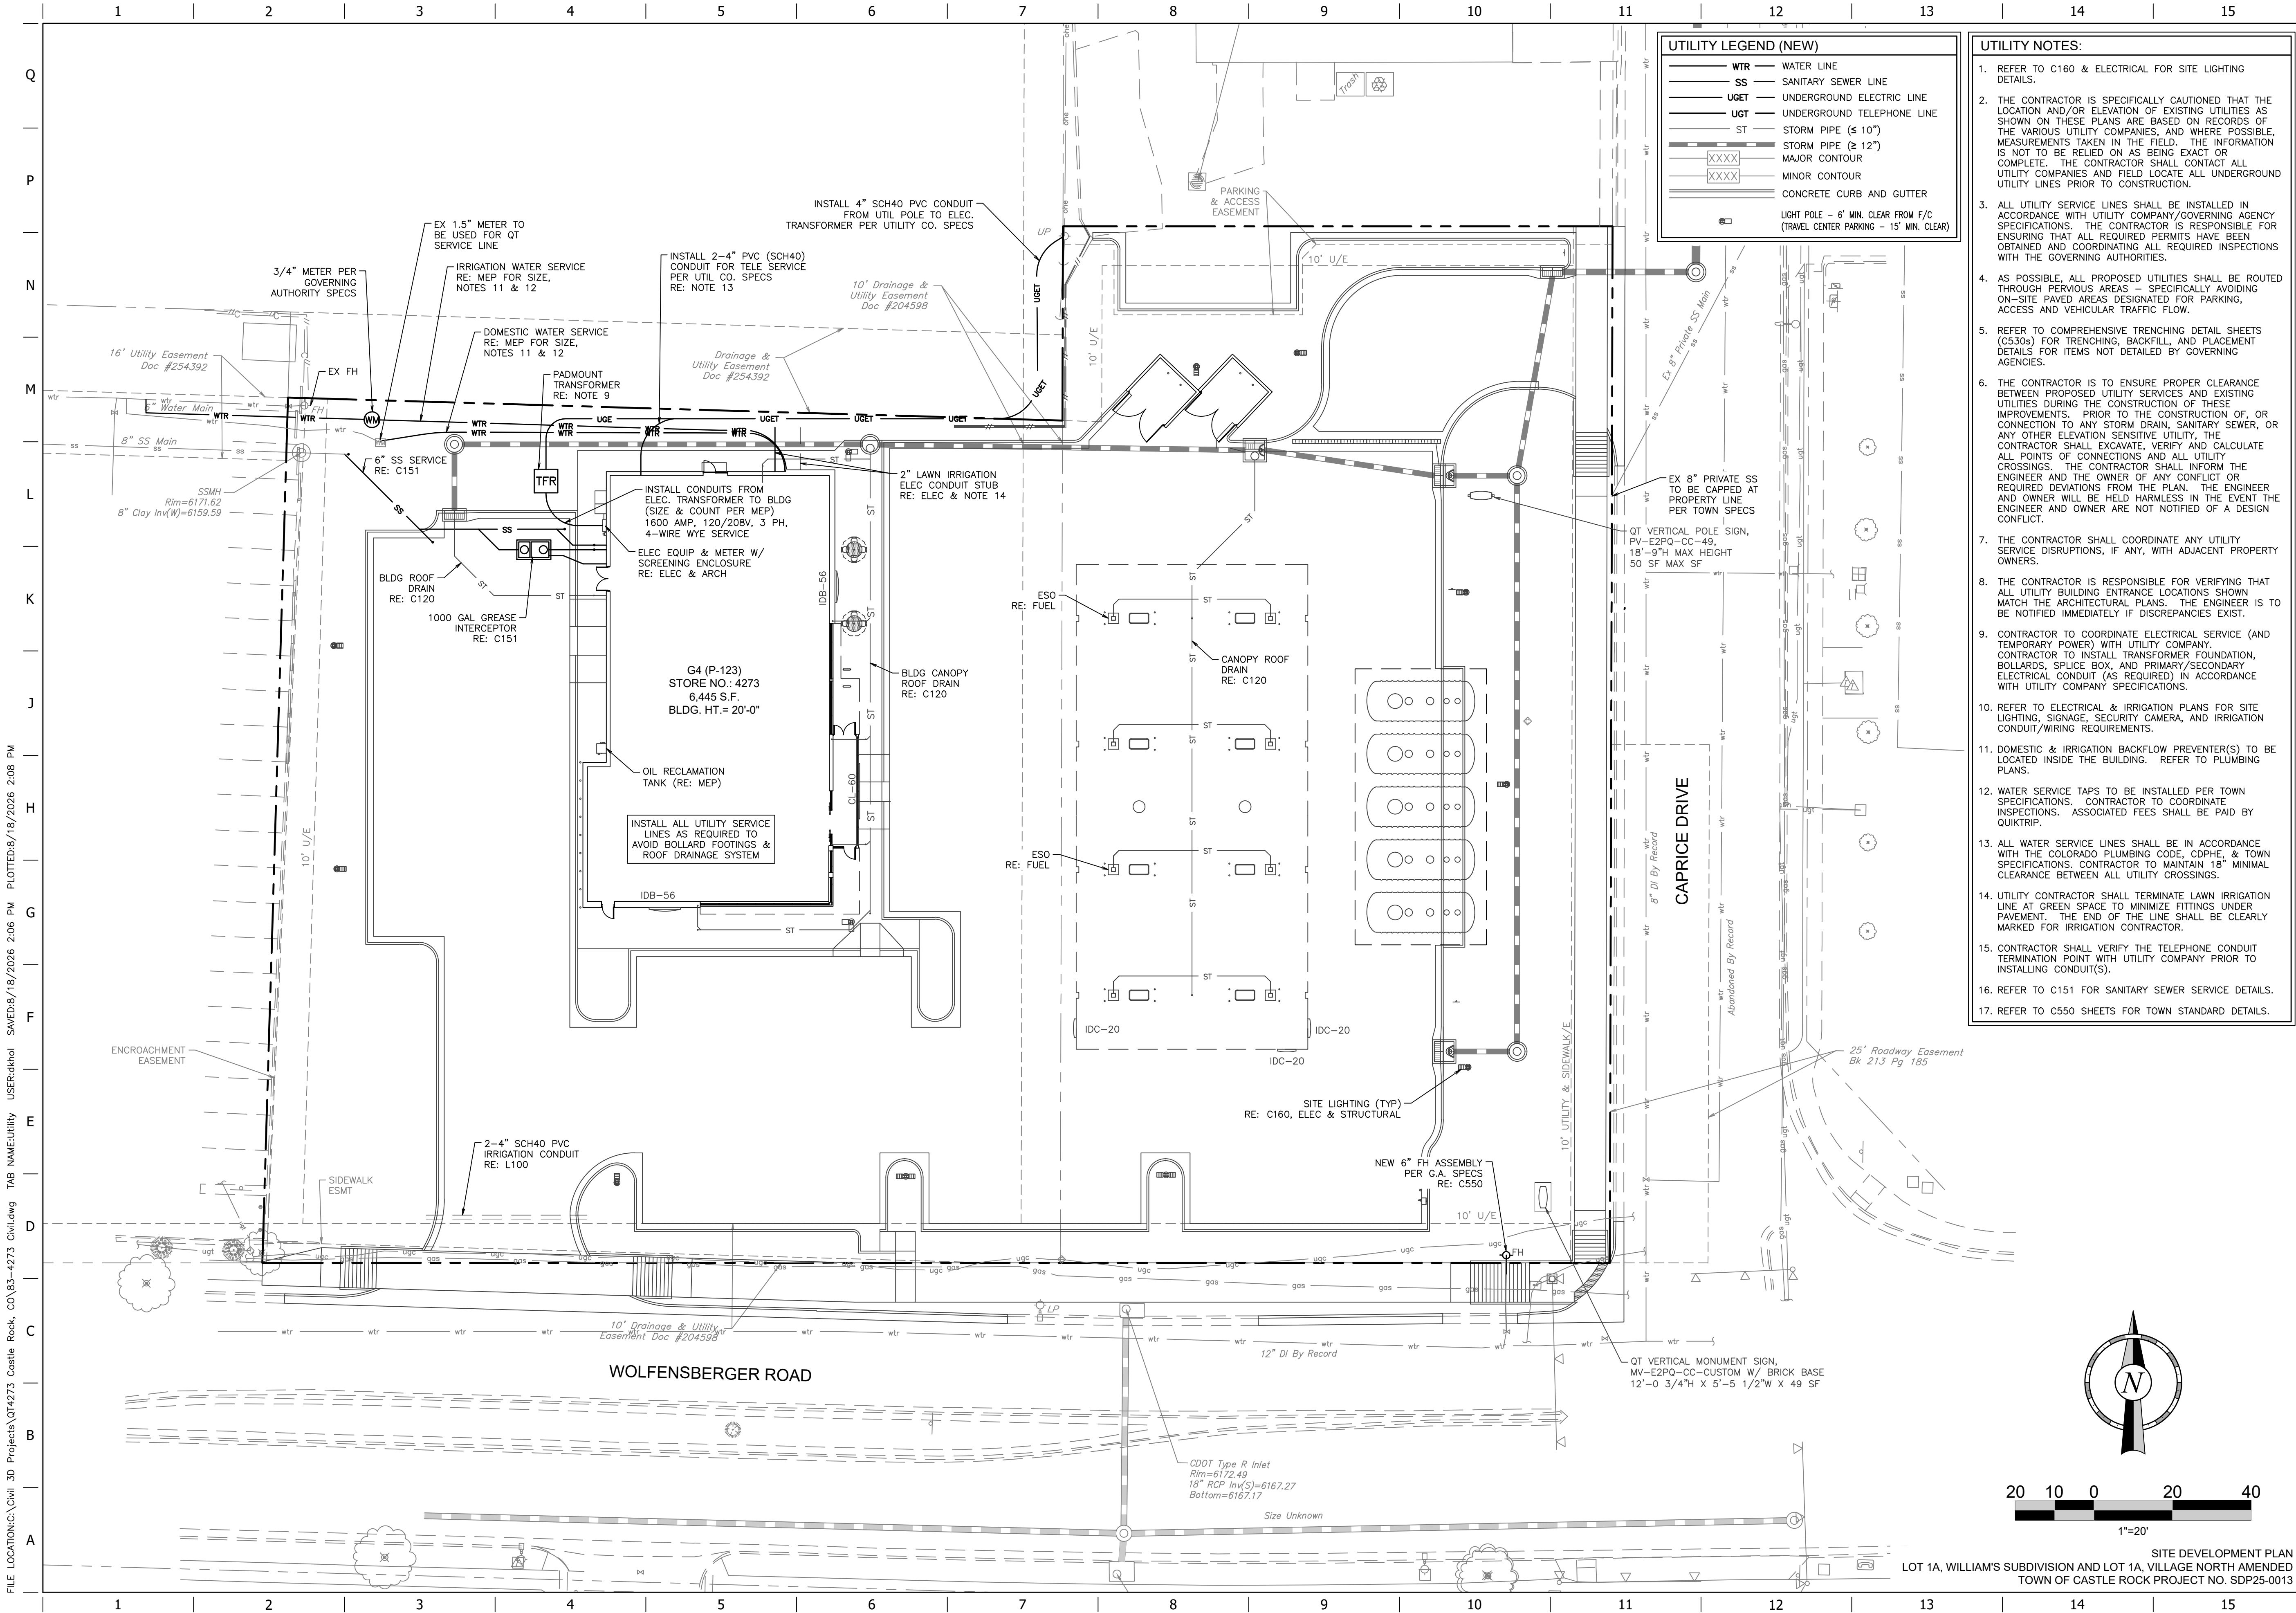

UTILITY LEGEND (NEW)

- WTR — WATER LINE
- SS — SANITARY SEWER LINE
- UGET — UNDERGROUND ELECTRIC LINE
- UGT — UNDERGROUND TELEPHONE LINE
- ST — STORM PIPE (≤ 10")
- ST — STORM PIPE (≥ 12")
- MAJOR CONTOUR
- MINOR CONTOUR
- CONCRETE CURB AND GUTTER

LIGHT POLE — 6' MIN. CLEAR FROM F/C
(TRAVEL CENTER PARKING — 15' MIN. CLEAR)

- UTILITY NOTES:**
- REFER TO C160 & ELECTRICAL FOR SITE LIGHTING DETAILS.
 - THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS ARE BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR SHALL CONTACT ALL UTILITY COMPANIES AND FIELD LOCATE ALL UNDERGROUND UTILITY LINES PRIOR TO CONSTRUCTION.
 - ALL UTILITY SERVICE LINES SHALL BE INSTALLED IN ACCORDANCE WITH UTILITY COMPANY/GOVERNING AGENCY SPECIFICATIONS. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ALL REQUIRED PERMITS HAVE BEEN OBTAINED AND COORDINATING ALL REQUIRED INSPECTIONS WITH THE GOVERNING AUTHORITIES.
 - AS POSSIBLE, ALL PROPOSED UTILITIES SHALL BE ROUTED THROUGH PERVIOUS AREAS. SPECIFICALLY AVOIDING ON-SITE PAVED AREAS DESIGNATED FOR PARKING, ACCESS AND VEHICULAR TRAFFIC FLOW.
 - REFER TO COMPREHENSIVE TRENCHING DETAIL SHEETS (C5308) FOR TRENCHING, BACKFILL, AND PLACEMENT DETAILS FOR ITEMS NOT DETAILED BY GOVERNING AGENCIES.
 - THE CONTRACTOR IS TO ENSURE PROPER CLEARANCE BETWEEN PROPOSED UTILITY SERVICES AND EXISTING UTILITIES DURING THE CONSTRUCTION OF THESE IMPROVEMENTS. PRIOR TO THE CONSTRUCTION OF, OR CONNECTION TO ANY STORM DRAIN, SANITARY SEWER, OR ANY OTHER ELEVATION SENSITIVE UTILITY, THE CONTRACTOR SHALL EXCAVATE, VERIFY AND CALCULATE ALL POINTS OF CONNECTIONS AND ALL UTILITY CROSSINGS. THE CONTRACTOR SHALL INFORM THE ENGINEER AND THE OWNER OF ANY CONFLICT OR REQUIRED DEVIATIONS FROM THE PLAN. THE ENGINEER AND OWNER WILL BE HELD HARMLESS IN THE EVENT THE ENGINEER AND OWNER ARE NOT NOTIFIED OF A DESIGN CONFLICT.
 - THE CONTRACTOR SHALL COORDINATE ANY UTILITY SERVICE DISRUPTIONS, IF ANY, WITH ADJACENT PROPERTY OWNERS.
 - THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT ALL UTILITY BUILDING ENTRANCE LOCATIONS SHOWN MATCH THE ARCHITECTURAL PLANS. THE ENGINEER IS TO BE NOTIFIED IMMEDIATELY IF DISCREPANCIES EXIST.
 - CONTRACTOR TO COORDINATE ELECTRICAL SERVICE (AND TEMPORARY POWER) WITH UTILITY COMPANY. CONTRACTOR TO INSTALL TRANSFORMER FOUNDATION, BOLLARDS, SPLICE BOX, AND PRIMARY/SECONDARY ELECTRICAL CONDUIT (AS REQUIRED) IN ACCORDANCE WITH UTILITY COMPANY SPECIFICATIONS.
 - REFER TO ELECTRICAL & IRRIGATION PLANS FOR SITE LIGHTING, SIGNAGE, SECURITY CAMERA, AND IRRIGATION CONDUIT/WIRING REQUIREMENTS.
 - DOMESTIC & IRRIGATION BACKFLOW PREVENTER(S) TO BE LOCATED INSIDE THE BUILDING. REFER TO PLUMBING PLANS.
 - WATER SERVICE TAPS TO BE INSTALLED PER TOWN SPECIFICATIONS. CONTRACTOR TO COORDINATE INSPECTIONS. ASSOCIATED FEES SHALL BE PAID BY QUIKTRIP.
 - ALL WATER SERVICE LINES SHALL BE IN ACCORDANCE WITH THE COLORADO PLUMBING CODE, COPPE, & TOWN SPECIFICATIONS. CONTRACTOR TO MAINTAIN 18" MINIMAL CLEARANCE BETWEEN ALL UTILITY CROSSINGS.
 - UTILITY CONTRACTOR SHALL TERMINATE LAWN IRRIGATION LINE AT GREEN SPACE TO MINIMIZE FITTINGS UNDER PAVEMENT. THE END OF THE LINE SHALL BE CLEARLY MARKED FOR IRRIGATION CONTRACTOR.
 - CONTRACTOR SHALL VERIFY THE TELEPHONE CONDUIT TERMINATION POINT WITH UTILITY COMPANY PRIOR TO INSTALLING CONDUIT(S).
 - REFER TO C151 FOR SANITARY SEWER SERVICE DETAILS.
 - REFER TO C550 SHEETS FOR TOWN STANDARD DETAILS.



PROJECT NO.: 83-4273

MDG
Midwest Design Group
Kansas City

PO Box 860015
Shawnee, KS 66286-0015
P 913.248.9385

SITE DEVELOPMENT PLAN

QuikTrip No. 4273

WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109




PROTOTYPE: P-123
DIVISION: 83
VERSION: 001
DESIGNED BY: DKH
DRAWN BY: CSH
REVIEWED BY: AMG

REV	DATE	DESCRIPTION

SHEET TITLE:
**SITE DEVELOPMENT PLAN
UTILITY PLAN**

SHEET NUMBER:
6 OF 18

FILE LOCATION: C:\Civil 3D Projects\Q14273 Castle Rock, CO\83-4273 Civil.dwg TAB NAME: Utility USER: dkhol SAVED: 8/18/2026 2:08 PM PLOTTED: 8/18/2026 2:08 PM



| 10 | 11

12	13	14	15
----	----	----	----


12	13	14	15
----	----	----	----

	14	15
--	----	----

13	14	15
----	----	----


[illegible]

#	FINISH	MANUFACTURER	SPECIFICATION
1	BRONZESTONE	INTERSTATE BRICK	ATLAS STRUCTURAL BRICK
2	MIDNIGHT	INTERSTATE BRICK	ATLAS STRUCTURAL BRICK
3	BRUSHED ALUMINUM	REYNOBOND	FASCIA
4	OSSIDO NERO	CROSSVILLE	STONE PANELS
5	RED POLYCARBONATE	ALLEN INDUSTRIES	ILLUMINATED BAND
6	QT BROWN	SHERWIN - WILLIAMS	METAL/PAINT
7	IDB-56	ALLEN INDUSTRIES	ILLUMINATED SIGNAGE
8	CL-60	ALLEN INDUSTRIES	ILLUMINATED SIGNAGE

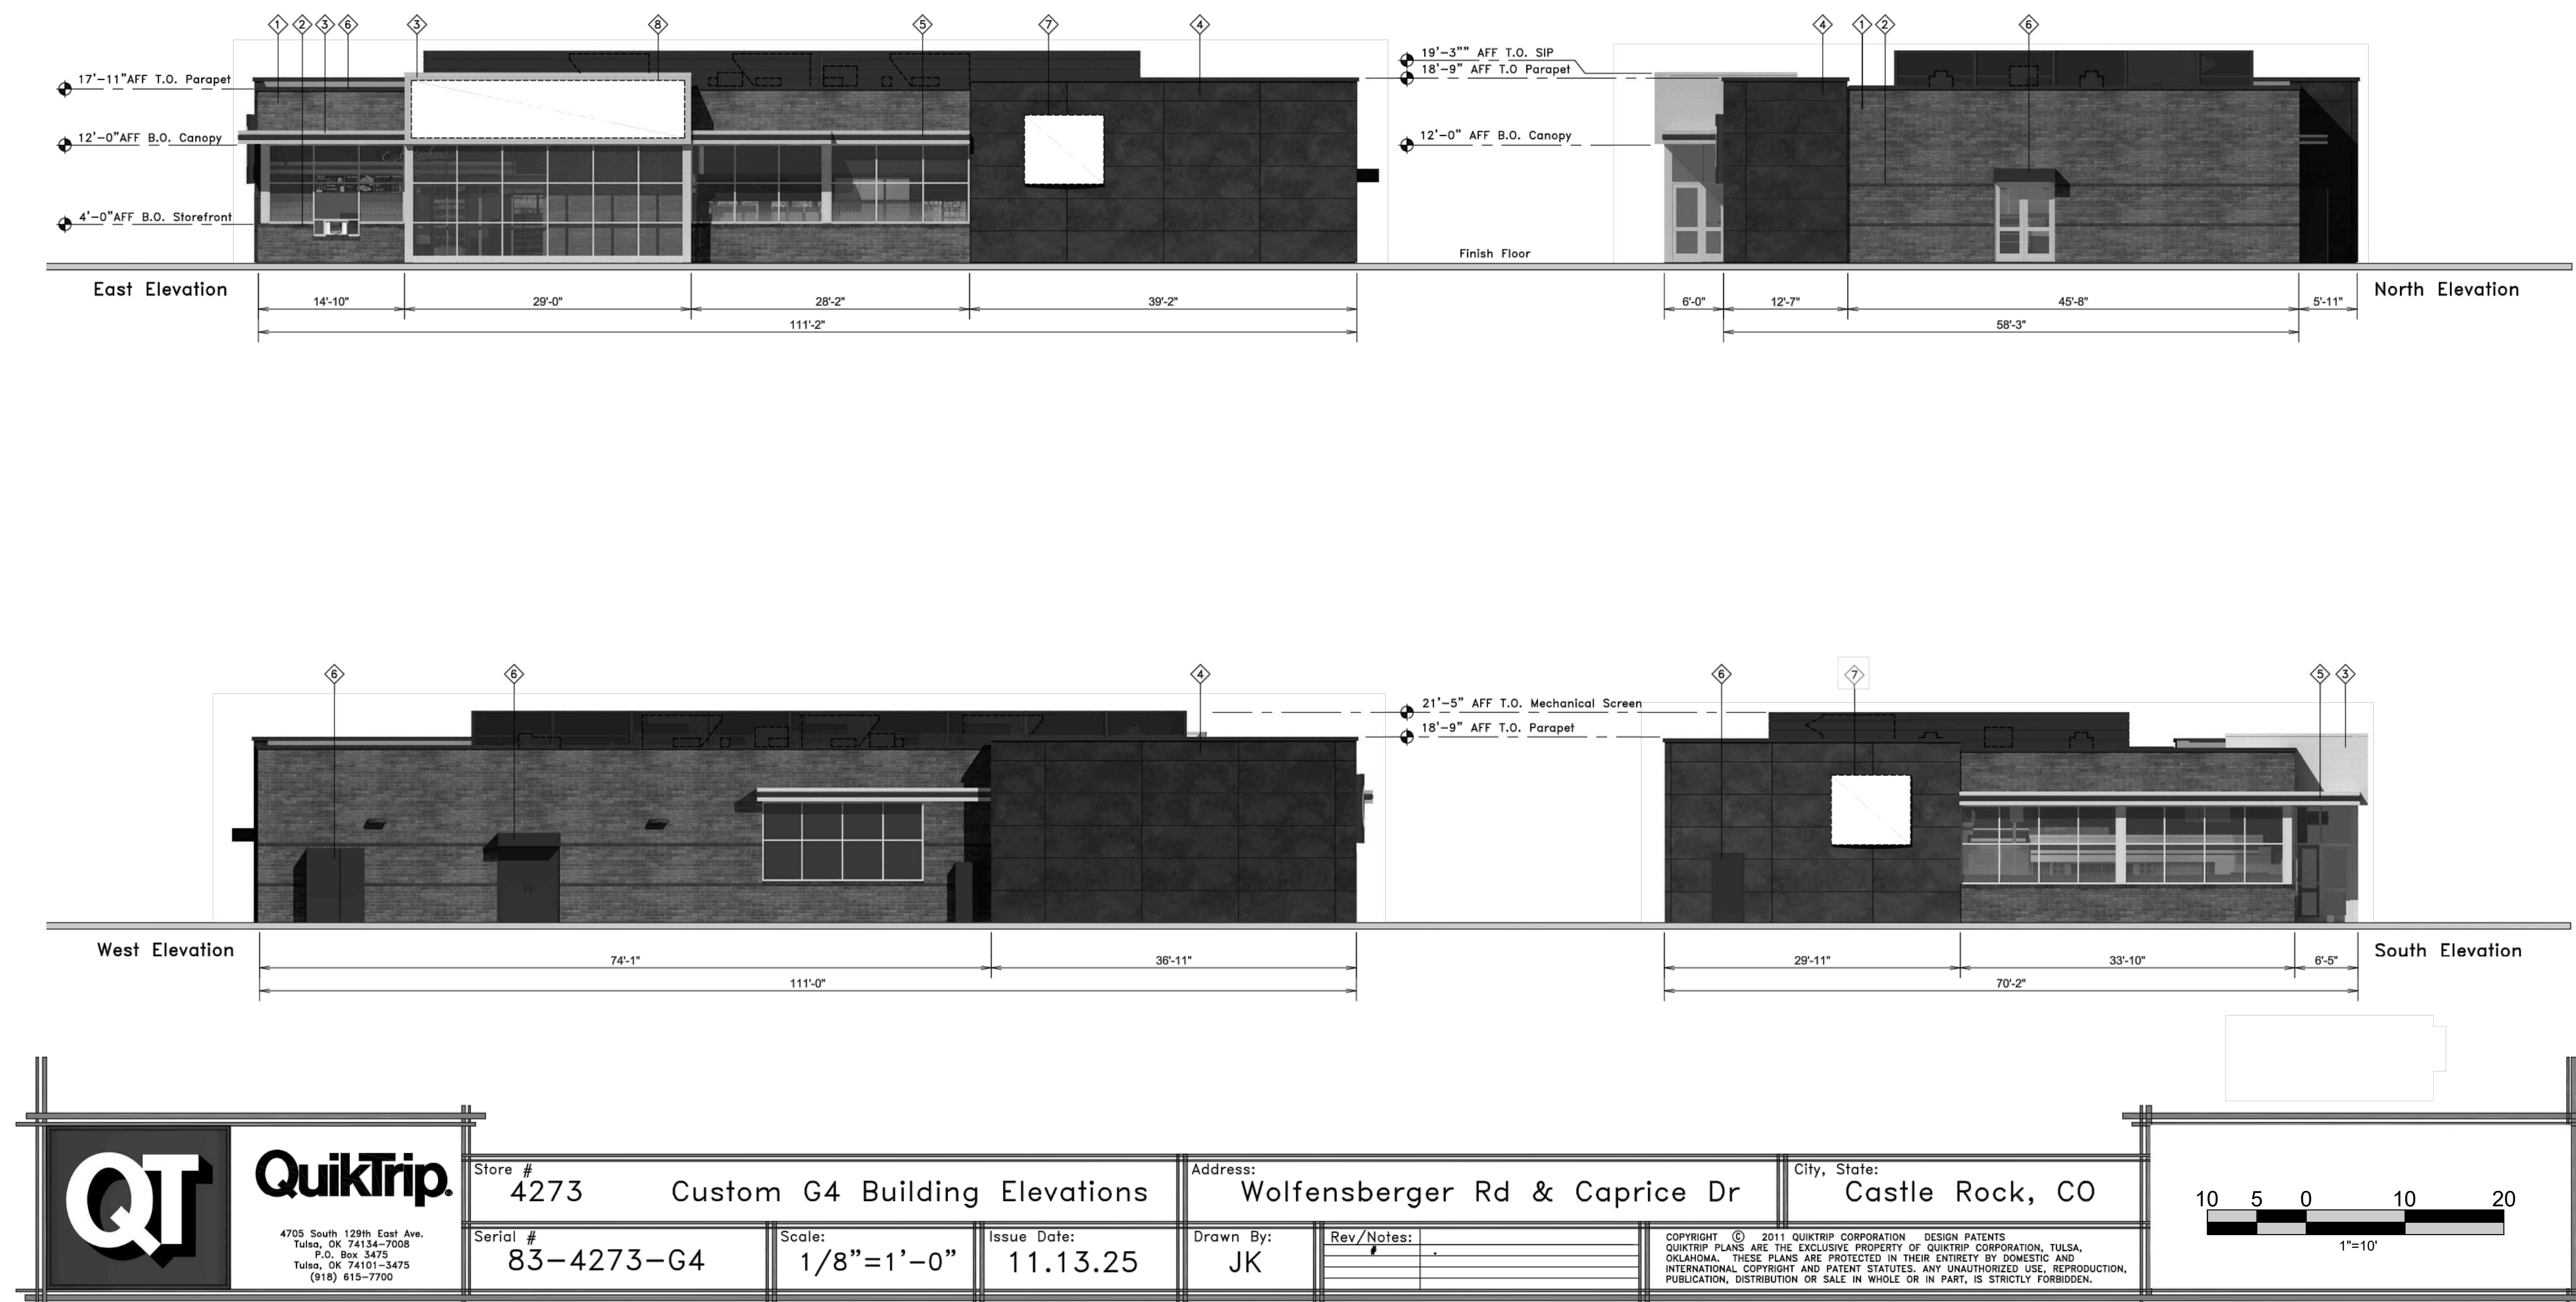

SITE DEVELOPMENT PLAN
LOT 1A, WILLIAM'S SUBDIVISION AND LOT 1A, VILLAGE NORTH AMENDED
TOWN OF CASTLE ROCK PROJECT NO. SDP25-0013

FILE LOCATION\\KCC\\Civil 3D Projects\\Q14273 Castle Rock, CO\\83-4273 Civil.dwg TAB NAME:Canopy Elevations USER:dkhol SAVED:8/18/2026 2:06 PM PLOTTED:8/19/2026 2:09 PM

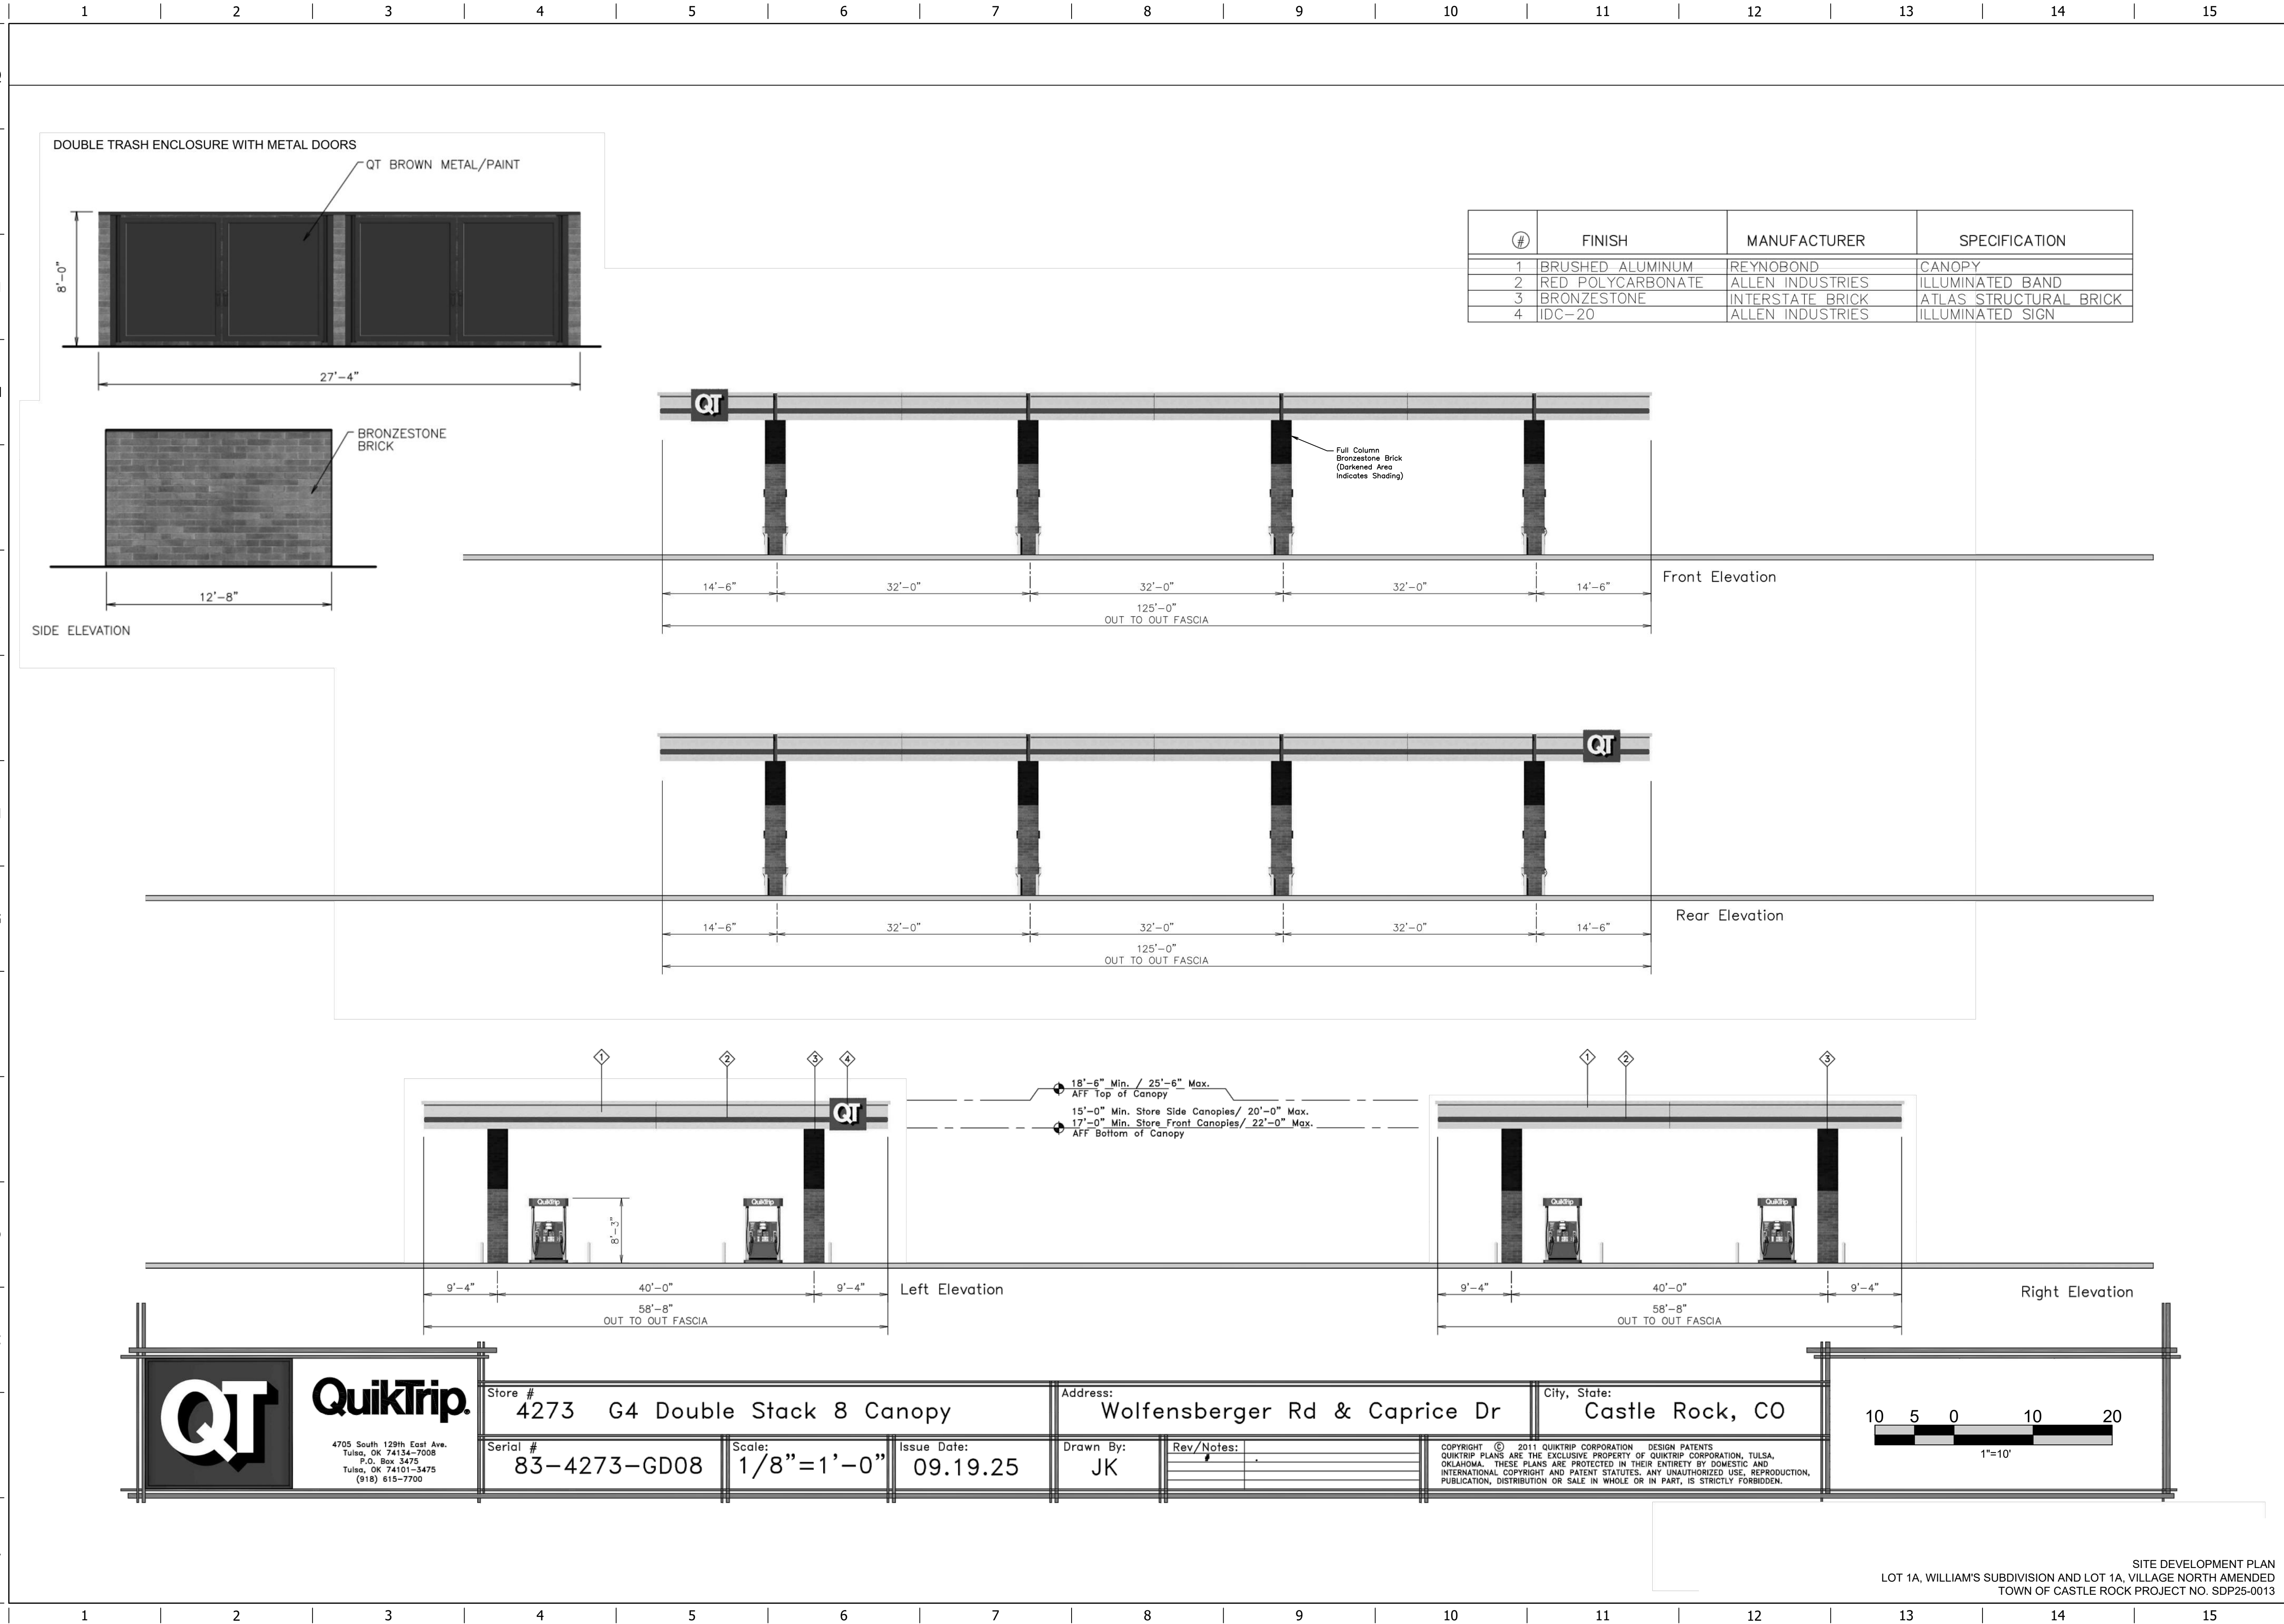

PROJECT NO.:83-4273

MDG
Midwest Design Group
Kansas City

PO Box 860015
Shawnee, KS 66286-0015
P 913.248.9385

SITE DEVELOPMENT PLAN
QuikTrip No. 4273

WOLFENSBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109



© COPYRIGHT QUIKTRIP CORPORATION 2011
ANY UNAUTHORIZED USE, REPRODUCTION,
PUBLICATION, DISTRIBUTION, OR SALE IN
WHOLE OR IN PART, IS STRICTLY FORBIDDEN.

PROTOTYPE: P-123
DIVISION: 83
VERSION: 001
DESIGNED BY: DKH
DRAWN BY: CSH
REVIEWED BY: AMG

REV	DATE	DESCRIPTION

ORIGINAL ISSUE DATE: 08/17/2026


SHEET TITLE:
SITE DEVELOPMENT PLAN
CANOPY & TRASH
ENCLOSURE ELEVATIONS

SHEET NUMBER:


9 OF 18

FILE LOCATION: C:\Civil 3D Projects\QT4273 Castle Rock - CO\83-4273 Civil.dwg TBS NAME: Material Board USER: dkhil SAVED: 5/18/2026 2:06 PM PLOTTED: 5/18/2026 2:09 PM


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Q															
P															
N															
M															
L															
K															
J															
H															
G															
F															
E															
D															
C															
B															
A															

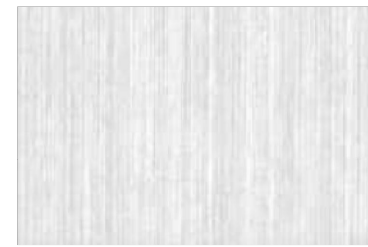

Brushed Aluminum - Reynobond
Building Corrice/Gas Canopy Fascia

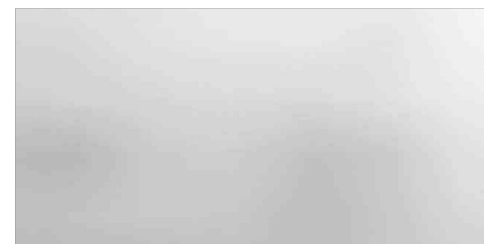

Aluminum - Tubelite
Entry Door/Window Frame
Bike Rack/ Table/ Seats
Umbrella / Canopy

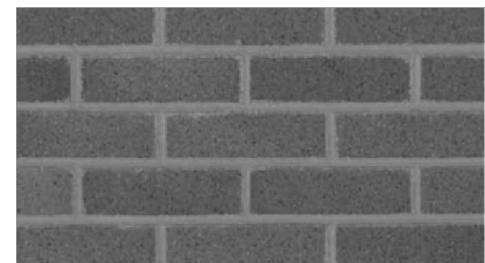

Bronzestone Brick -
Interstate Brick - Building
Dumpster Enclosure/ Monument Sign Base
Canopy Columns

Color Specifications	
All Paint Finishes to be Akzo Nobel	
	Opaque Silver
	Translucent White
	Black - Low Gloss
	Matte White (Interior of Sign)
	Match 9M Cardinal Red #3632-93
	Match PMS 349C

Monument & Pole Signs



QT
G4 Material Samples
Convenience Store with Fuel
Prepared by: QuikTrip



TILE - Ossido Nero
Crossville - Building



Midnight Black Brick -
Interstate Brick - Building



QT BROWN Metal Paint -
Light Poles/Service Doors/
Trash Enclosure Doors/ Trash Cans
Sherwin Williams - 854TZ404



Translucent #2793 Red -
Accent Band/Awning
IDB-56 & CL-60 Building Signs
Canopy Signs & Accent Band on Canopy

SITE DEVELOPMENT PLAN
LOT 1A, WILLIAM'S SUBDIVISION AND LOT 1A, VILLAGE NORTH AMENDED
TOWN OF CASTLE ROCK PROJECT NO. SDP25-0013

PROJECT NO.:83-4273



SITE DEVELOPMENT PLAN
QuikTrip No. 4273
WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109



© COPYRIGHT QUIKTRIP CORPORATION 201
ANY UNAUTHORIZED USE, REPRODUCTION,
PUBLICATION, DISTRIBUTION, OR SALE IN
WHOLE OR IN PART, IS STRICTLY FORBIDDEN

PROTOTYPE: P-123
DIVISION: 83
VERSION: 001
DESIGNED BY: DKH
DRAWN BY: CSH
REVIEWED BY: AMG

[illegible]

SHEET TITLE:

SITE DEVELOPMENT PLAN
MATERIAL BOARD

SHEET NUMBER:

11 OF 18

Q
P
N
M
L
K
J
H
G
F
E
D
C
B
A

Category #: SLM-LED-12L-SIL-3-40-70-CRI-IL

Project :

Prepared By :

Date :



Slice Medium - SLM Outdoor LED Area Light

The Slice's sleek design makes it perfectly-suited for commercial & industrial applications, while its cost-effective die-cast aluminum housing makes its acquisition cost very competitive. The Slice offers high performance silicone optics die cast aluminum housing 42000+ lumens and is available with Integral AirLink Synapse controls.

Features & Specifications


Optical System

- State-of-the-Art one-piece silicone optic sheet delivers industry leading optical control with an integrated gasket to provide IP66 rated sealed optical chamber in 1 component.
- Proprietary silicone refractor optics provide exceptional coverage and uniformity in IES Types 2, 3, SW, FT and FTA.
- Silicone optical material does not yellow or crack with age and provides a typical light transmission of 95%.
- Zero uplight.
- Available in 6000K, 4000K, 3000K, and 2700K color temperatures per ANSI C78.377. Optional 5700K CCT available in 90CRI only.
- Minimum CRI of 70. Optional 80 and 90 CRI available, consult factory for lead time.
- Integral Louver (IL) option available for improved back-light control without sacrificing street side performance. See page 5 for more details.

Electrical

 - High performance driver features over-voltage, under-voltage, short-circuit and over-temperature protection.
 - 0-10V dimming (10% - 100%) standard.
 - Standard Universal Voltage (120-277 Vac) Input 50/60 Hz or optional High Voltage (347-480 Vac).
 - L80 Calculated Life >100k Hours (See Lumen Maintenance on page 3)
 - Total harmonic distortion <20%.
 - Operating temperature: -40°C to +50°C (-40°F to +122°F). 42L lumen package rated to +40°C.
 - Power factor > .90.
 - Input power stays constant over life.
 - Field replaceable surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).
 - High efficiency LEDs mounted to metal-core circuit board to maximize heat dissipation.
 - Terminal block provided to allow up to 10ga wire.
 - Components are fully encased in potting material for moisture resistance. Driver complies with FCC standards. Driver and key electronic components can easily be accessed.

Product Dimensions

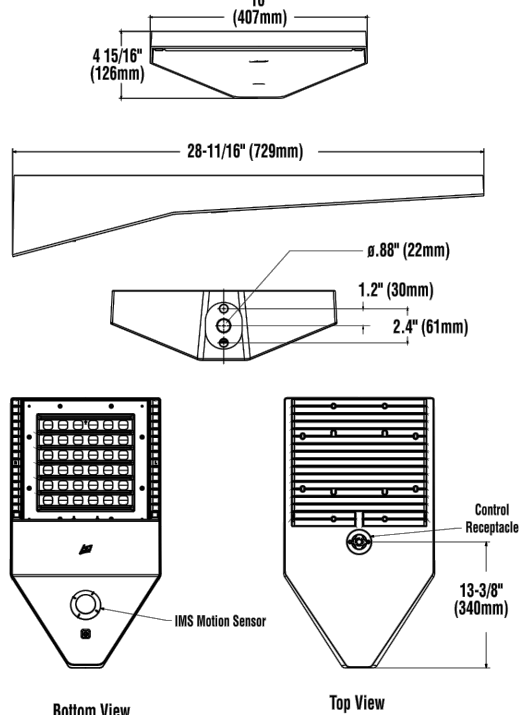

Bottom View Top View

LSI Industries Inc. 10000 Alliance Rd Cincinnati, OH 45242 • www.lsi-industries.com • (513) 372-3200 • ©LSI Industries Inc. All Rights Reserved.

08/28/18



Slice Medium - SLM Outdoor LED Area Light

Features & Specifications (Cont.)

Construction

- Rugged die-cast aluminum housing contains factory prewired driver and optical unit. Cast aluminum wiring access door located underneath.
- Designed to mount to square poles.
- Luminaire is proudly manufactured in the U.S. of U.S. and imported parts.
- IP66 rated luminaire protects integral components from harsh environments.
- 3G rated for ANSI C136.31 high vibration applications.
- Features are finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling. Other standard LSI finishes available. Consult factory.
- Shipping weight: 30 lbs in carton.

Controls

Wireless Control System

To make this fixture AirLink ready, simply order one of the following options:

- The integrated **Wireless Lighting Controller**: ALSOC or ALSCH (see ordering guide) as the controls option, or
- Integrated Wireless Controller option (above) with integrated motion sensor: ALSCS (ordering guide for mounting heights) or
- The 7-Pin Photoelectric Control Receptacle: CR7P as the controls option, and either the 2-Pin or 7-Pin **Turret Lock Controller**: ALSOU UNV T.L.C. or ALSOU UNV T.L.C. as an accessory.

To see how the components of AirLink system work together, reference the diagram in the controls section of this specification. For more information on our AirLink products, visit our website: www.lsi-airlink.com/airlink-portal.

Stand-Alone Controls

- The integral passive infrared motion sensor (IMS) activates switching of luminaire light levels (see the controls section for more details).
- The 7-pin ANSI C136.41-2013 photoelectric receptacle option (CR7P) is available for turret lock photocontrols or wireless control modules.
- The Button Type Photoelectric (PC) are capable of switching luminaires ON/OFF in response to the amount of available daylight.

Installation

- A single fastener secures the hinged door, underneath the housing and provides quick & easy access to the electrical compartment for installing/servicing.
- Included terminal block provides quick and easy on-site wiring.
- Utilizes LSI's traditional "P" drill pattern for easy fastening of LSI products. (See drawing on page 1)

Warranty

- LSI LED Fixtures carry a 5-year warranty.

Listings

- Listed to UL 1598 and UL E750.
- RoHS Compliant.
- American Recovery and Reinvestment Act Funding Compliant.
- DA Compliant, with 3000K color temperature selection.
- Title 24 Compliant, see local ordinance for qualification information.
- Suitable for Wet Locations.
- IP66 rated Luminaire, IP68 rated optical chamber.
- 3G rated for ANSI C136.31 high vibration applications

Performance

ELECTRICAL DATA (LMWP)*									
Lumens	Wattage	120V	208V	240V	277V	347V	480V		
62	0.64	0.54	0.34	0.24	0.24	0.24	0.14		
124	0.67	0.64	0.44	0.34	0.34	0.34	0.24		
186	0.81	0.74	0.54	0.44	0.44	0.44	0.34		
248	1.04	0.94	0.64	0.54	0.54	0.54	0.44		
310	1.24	1.14	0.74	0.64	0.64	0.64	0.54		
372	1.44	1.34	0.84	0.74	0.74	0.74	0.64		
434	1.64	1.54	0.94	0.84	0.84	0.84	0.74		
496	1.84	1.74	1.04	0.94	0.94	0.94	0.84		
558	2.04	1.94	1.14	1.04	1.04	1.04	0.94		
620	2.24	2.14	1.24	1.14	1.14	1.14	1.04		
682	2.44	2.34	1.34	1.24	1.24	1.24	1.14		
744	2.64	2.54	1.44	1.34	1.34	1.34	1.24		
806	2.84	2.74	1.54	1.44	1.44	1.44	1.34		
868	3.04	2.94	1.64	1.54	1.54	1.54	1.44		
930	3.24	3.14	1.74	1.64	1.64	1.64	1.54		
992	3.44	3.34	1.84	1.74	1.74	1.74	1.64		
1054	3.64	3.54	1.94	1.84	1.84	1.84	1.74		
1116	3.84	3.74	2.04	1.94	1.94	1.94	1.84		
1178	4.04	3.94	2.14	2.04	2.04	2.04	1.94		
1240	4.24	4.14	2.24	2.14	2.14	2.14	2.04		
1302	4.44	4.34	2.34	2.24	2.24	2.24	2.14		
1364	4.64	4.54	2.44	2.34	2.34	2.34	2.24		
1426	4.84	4.74	2.54	2.44	2.44	2.44	2.34		
1488	5.04	4.94	2.64	2.54	2.54	2.54	2.44		
1550	5.24	5.14	2.74	2.64	2.64	2.64	2.54		
1612	5.44	5.34	2.84	2.74	2.74	2.74	2.64		
1674	5.64	5.54	2.94	2.84	2.84	2.84	2.74		
1736	5.84	5.74	3.04	2.94	2.94	2.94	2.84		
1798	6.04	5.94	3.14	3.04	3.04	3.04	2.94		
1860	6.24	6.14	3.24	3.14	3.14	3.14	3.04		
1922	6.44	6.34	3.34	3.24	3.24	3.24	3.14		
1984	6.64	6.54	3.44	3.34	3.34	3.34	3.24		
2046	6.84	6.74	3.54	3.44	3.44	3.44	3.34		
2108	7.04	6.94	3.64	3.54	3.54	3.54	3.44		
2170	7.24	7.14	3.74	3.64	3.64	3.64	3.54		
2232	7.44	7.34	3.84	3.74	3.74	3.74	3.64		
2294	7.64	7.54	3.94	3.84	3.84	3.84	3.74		
2356	7.84	7.74	4.04	3.94	3.94	3.94	3.84		
2418	8.04	7.94	4.14	4.04	4.04	4.04	3.94		
2480	8.24	8.14	4.24	4.14	4.14	4.14	4.04		
2542	8.44	8.34	4.34	4.24	4.24	4.24	4.14		
2604	8.64	8.54	4.44	4.34	4.34	4.34	4.24		
2666	8.84	8.74	4.54	4.44	4.44	4.44	4.34		
2728	9.04	8.94	4.64	4.54	4.54	4.54	4.44		
2790	9.24	9.14	4.74	4.64	4.64	4.64	4.54		
2852	9.44	9.34	4.84	4.74	4.74	4.74	4.64		
2914	9.64	9.54	4.94	4.84	4.84	4.84	4.74		
2976	9.84	9.74	5.04	4.94	4.94	4.94	4.84		
3038	10.04	9.94	5.14	5.04	5.04	5.04	4.94		
3100	10.24	10.14	5.24	5.14	5.14	5.14	5.04		
3162	10.44	10.34	5.34	5.24	5.24	5.24	5.14		
3224	10.64	10.54	5.44	5.34	5.34	5.34	5.24		
3286	10.84	10.74	5.54	5.44	5.44	5.44	5.34		
3348	11.04	10.94	5.64	5.54	5.54	5.54	5.44		
3410	11.24	11.14	5.74	5.64	5.64	5.64	5.54		
3472	11.44	11.34	5.84	5.74	5.74	5.74	5.64		
3534	11.64	11.54	5.94	5.84	5.84	5.84	5.74		
3596	11.84	11.74	6.04	5.94	5.94	5.94	5.84		
3658	12.04	11.94	6.14	6.04	6.04	6.04	5.94		
3720	12.24	12.14	6.24	6.14	6.14	6.14	6.04		
3782	12.44	12.34	6.34	6.24	6.24	6.24	6.14		
3844	12.64	12.54	6.44	6.34	6.34	6.34	6.24		
3906	12.84	12.74	6.54	6.44	6.44	6.44	6.34		
3968	13.04	12.94	6.64	6.54	6.54	6.54	6.44		
4030	13.24	13.14	6.74	6.64	6.64	6.64	6.54		
4092	13.44	13.34	6.84	6.74	6.74	6.74	6.64		
4154	13.64	13.54	6.94	6.84	6.84	6.84	6.74		
4216	13.84	13.74	7.04	6.94	6.94	6.94	6.84		
4278	14.04	13.94	7.14	7.04	7.04	7.04	6.94		
4340	14.24	14.14	7.24	7.14	7.14	7.14	7.04		
4402	14.44	14.34	7.34	7.24	7.24	7.24	7.14		
4464	14.64	14.54	7.44	7.34	7.34	7.34	7.24		
4526	14.84	14.74	7.54	7.44	7.44	7.44	7.34		
4588	15.04	14.94	7.64	7.54	7.54	7.54	7.44		
4650	15.24	15.14	7.74	7.64	7.64	7.64	7.54		
4712	15.44	15.34	7.84	7.74	7.74	7.74	7.64		
4774	15.64	15.54	7.94	7.84	7.84	7.84	7.74		
4836	15.84	15.74	8.04	7.94	7.94	7.94	7.84		
4898	16.04	15.94	8.14	8.04	8.04	8.04	7.94		
4960	16.24	16.14	8.24	8.14	8.14	8.14	8.04		
5022	16.44	16.34	8.34	8.24	8.24	8.24	8.14		
5084	16.64	16.54	8.44	8.34	8.34	8.34	8.24		
5146	16.84	16.74	8.54	8.44	8.44	8.44	8.34		
5208	17.04	16.94	8.64	8.54	8.54	8.54	8.44		
5270	17.24	17.14	8.74	8.64	8.64	8.64	8.54		
5332	17.44	17.34	8.84	8.74	8.74	8.74	8.64		
5394	17.64	17.54	8.94	8.84	8.84	8.84	8.74		
5456	17.84	17.74	9.04	8.94	8.94	8.94	8.84		
5518	18.04	17.94	9.14	9.04	9.04	9.04	8.94		
5580	18.24	18.14	9.24	9.14	9.14	9.14	9.04		
5642	18.44	18.34	9.34	9.24	9.24	9.24	9.14		
5704	18.64	18.54	9.44	9.34	9.34	9.34	9.24		
5766	18.84	18.74	9.54	9.44	9.44	9.44	9.34		
5828	19.04	18.94	9.64	9.54	9.54	9.54	9.44		
5890	19.24	19.14	9.74	9.64	9.64	9.64	9.54		
5952	19.44	19.34	9.84	9.74	9.74	9.74	9.64		
6014	19.64	19.54	9.94	9.84	9.84	9.84	9.74		
6076	19.84	19.74	10.04	9.94	9.94	9.94	9.84		
6138	20.04	19.94	10.14	10.04	10.04	10.04	9.94		
6200	20.24	20.14	10.24	10.14	10.14	10.14	10.04		
6262	20.44	20.34	10.34	10.24	10.24	10.24	10.14		
6324	20.64	20.54	10.44	10.34	10.34	10.34	10.24		
6386	20.84	20.74	10.54	10.44	10.44	10.44	10.34		
6448	21.04	20.94	10.64	10.54	10.54	10.54	10.44		
6510	21.24	21.14	10.74	10.64	10.64	10.64	10.54		
6572	21.44	21.34	10.84	10.74	10.74	10.74	10.64		
6634	21.64	21.54	10.94	10.84	10.84	10.84	10.74		
6696	21.84	21.74	11.04	10.94	10.94	10.94	10.84		
6758	22.04	21.94	11.14	11.04	11.04	11.04	10.94		
6820	22.24	22.14	11.24	11.14	11.14	11.14	11.04		
6882	22.44	22.34	11.34	11.24	11.24	11.24	11.14		
6944	22.64	22.54	11.44	11.34	11.34	11.34	11.24		
7006	22.84	22.74	11.54	11.44	11.44	11.44	11.34		
7068	23.04	22.94	11.64	11.54	11.54	11.54	11.44		
7130	23.24	23.14	11.74	11.64	11.64	11.64	11.54		
7192	23.44	23.34	11.84	11.74	11.74	11.74	11.64		
7254	23.64	23.54	11.94	11.84	11.84	11.84	11.74		
7316	23.84	23.74	12.04	11.94	11.94	11.94	11.84		
7378	24.04	23.94	12.14	12.04	12.04	12.04	11.94		
744									







A	
B	
C	
D	
E	
F	
G	
H	
J	
K	
L	
M	
N	
P	
Q	

A	
B	
C	
D	
E	
F	
G	
H	
J	
K	
L	
M	
N	
P	
Q	

A	
B	
C	
D	
E	
F	
G	
H	
J	
K	
L	
M	
N	
P	
Q	

[illegible]

		type																							
Mirada Wall Sconce (XWM)																									
PERFORMANCE																									
RETURNED LUMENS*																									
Lumen Package		Distribution		CRI		3000K		4000K		5000K		Wattage													
						Delivered Lumens	Efficiency	Delivered Lumens	Efficiency	Delivered Lumens	Efficiency														
						3000K	lm/W	4000K	lm/W	5000K	lm/W														
US	2	70	70	90	78	30-0-0	130	34	30-0-0	135	105	30-0-0													
	2	70	70	90	78	30-0-0	130	34	30-0-0	135	105	30-0-0													
	2	70	70	90	78	30-0-0	130	34	30-0-0	135	105	30-0-0													
CA	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
EU	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
UK	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
AU	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
NZ	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
SA	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
IN	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
JP	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													
	1	30	420	90	42	0-0-0	140	147	0-0-0	440	140	0-0-0													

																																																																																																			</
---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---

PROJECT NO.: 83-4273

CRUX
TECHNOLOGY • SECURITY SOLUTIONS
800.685.6440
www.cruxsolutions.com

SITE DEVELOPMENT PLAN

QuikTrip No. 4273

WOLFENBERGER ROAD & CAPRICE DRIVE
CASTLE ROCK, DOUGLAS COUNTY, COLORADO 80109

[illegible]